

WAAS CH 53417 W35A	APP CRS 353°	Rwy Idg TDZE 1561 Apt Elev 1563
--	------------------------	---


RNAV (GPS) RWY 35

HOBART RGNL (HBR)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase LPV DA to 1882 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 2020 feet and visibility all Cats ¼ SM; increase all MDAs 80 feet and Circling Cat C visibility ¼ SM. Baro-VNAV NA when using Altus/Quartz Mountain Rgnl altimeter setting. VDP NA with Altus/Quartz Mountain Rgnl altimeter setting.

MISSED APPROACH: Climb to 3400 direct BIPGE and hold.

ASOS 133.325	ALTUS APP CON★ 125.1 353.7	UNICOM 122.8 (CTAF)
------------------------	--------------------------------------	-------------------------------

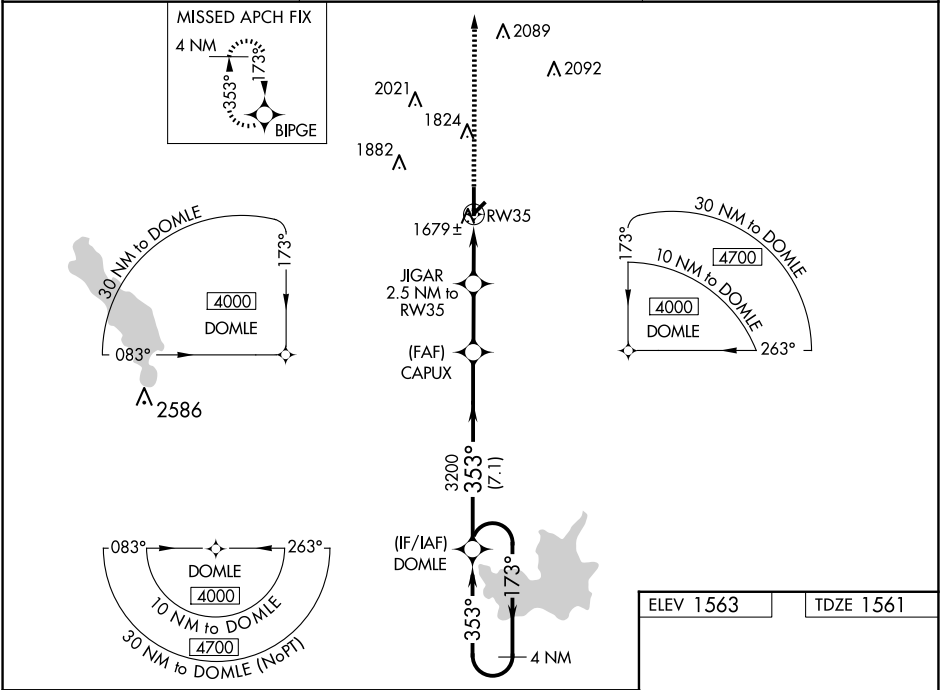

4 NM Holding Pattern		DOMLE	CAPUX	JIGAR 2.5 NM to RW35	BIPGE 3400
4000 ← 173°		353° →	353°	*LNNAV only.	
GP 3.00° TCH 42		3200	*2400	*1.1 NM to RW35	
7.1 NM		2.5 NM	1.4 NM	1.1	
CATEGORY	A	B	C	D	
LPV DA	1811-1		250 (300-1)		
LNAV/VNAV DA	1949-1¼		388 (400-1¼)		
LNAV MDA	1940-1	379 (400-1)	1940-1½	1940-2	
			379 (400-1½)	379 (400-2)	
CIRCLING	1980-1	2020-1	2320-2¼	2460-3	
	417 (500-1)	457 (500-1)	757 (800-2¼)	897 (900-3)	

