

HOBART, OKLAHOMA

AL-912 (FAA)

24361


VORTAC HBR 115.85 Chan 105(Y)	APP CRS 354°	Rwy Idg 5507 TDZE 1561 Apt Elev 1563
---	------------------------	---

VOR RWY 35
HOBART RGNL (HBR)

V When local altimeter setting not received, use **Altus/Quartz Mountain Rgnl** altimeter setting and increase all MDAs 80 feet, increase S-35 Cats C/D and Circling Cat C visibility $\frac{1}{4}$ SM, increase FAPRA fix minimums S-35 Cats C/D and Circling Cat C visibility $\frac{1}{4}$ SM. VDP NA when using **Altus/Quartz Mountain Rgnl** altimeter setting.

MISSED APPROACH: Climb to 2100, then climbing right turn to 3800 direct HBR VORTAC and hold.

ASOS 133,325	ALTUS APP CON ★ 125.1 353.7	UNICOM 122.8 (CTAF)
------------------------	---------------------------------------	-------------------------------

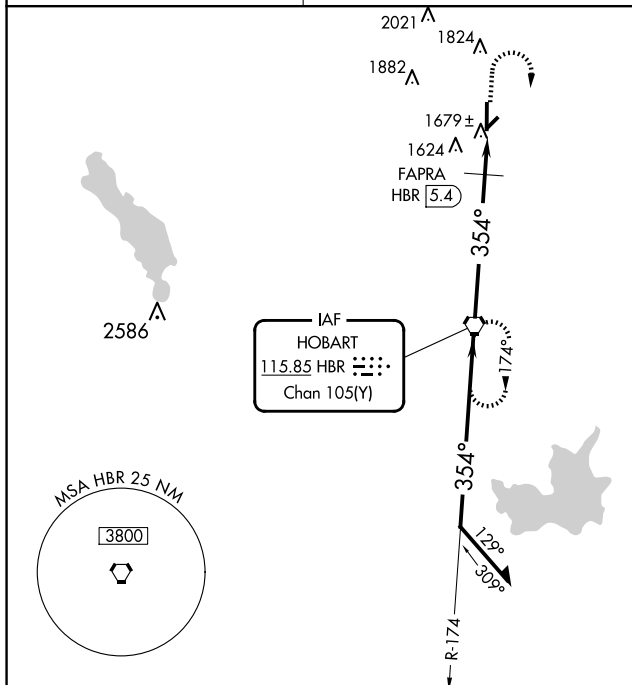

Remain within 10 NM

HBR VORTAC

2.94 NM

TCH 42

FAPRA HBR 5.4

3800

174°

354°

3800

*2060


HBR 6

HBR 7

2100	3800	HBR
↑	↷	⬡

*2140 when using Alnus/Quartz Mountain Rgnl altimeter setting.

			← 5.4 NM	0.6	1 NM	
CATEGORY	A	B	C		D	
S-35	2060-1	499 (500-1)	2060-1¼ 499 (500-1¼)		2060-1½ 499 (500-1½)	
CIRCLING	2060-1	497 (500-1)	2320-2¼ 757 (800-2¼)		2460-3 897 (900-3)	
FAPRA FIX MINIMUMS						
S-35	1980-1	419 (500-1)	1980-1¼		419 (500-1¼)	
CIRCLING	1980-1 417 (500-1)	2020-1 457 (500-1)	2320-2¼ 757 (800-2¼)		2460-3 897 (900-3)	

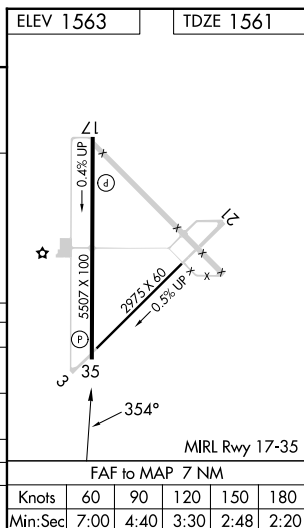

HOBART, OKLAHOMA

Amdt 9A 04NOV21

34°59'N-99°03'W

HOBART RGNL (HBR)
VOR RWY 35

SC-1, 27 NOV 2025 to 25 DEC 2025

SC-1, 27 NOV 2025 to 25 DEC 2025