

WAAS CH 40417 W22A	APP CRS 224°	Rwy Ldg TDZE Apt Elev 6701 805 808
--	------------------------	--


RNAV (GPS) RWY 22

SOUTHERN WISCONSIN RGNL (JVL)

⚠ Circling to Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Rockford altimeter setting and increase LPV DA to 1189 feet, LNAV/VNAV DA to 1313 feet, and all MDAs 80 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ½ SM, LNAV Cats C/D visibility ¾ SM and Circling Cats C/D visibility ¼ SM. VDP NA with Rockford altimeter setting.

MISSED APPROACH: Climb to 3100 direct CULMO and hold.

ATIS 128.25	ROCKFORD APP CON 121.0 327.0	JANESVILLE TOWER★ 118.8 (CTAF) 225.4	GND CON 121.65	UNICOM 122.95
-----------------------	--	--	--------------------------	-------------------------

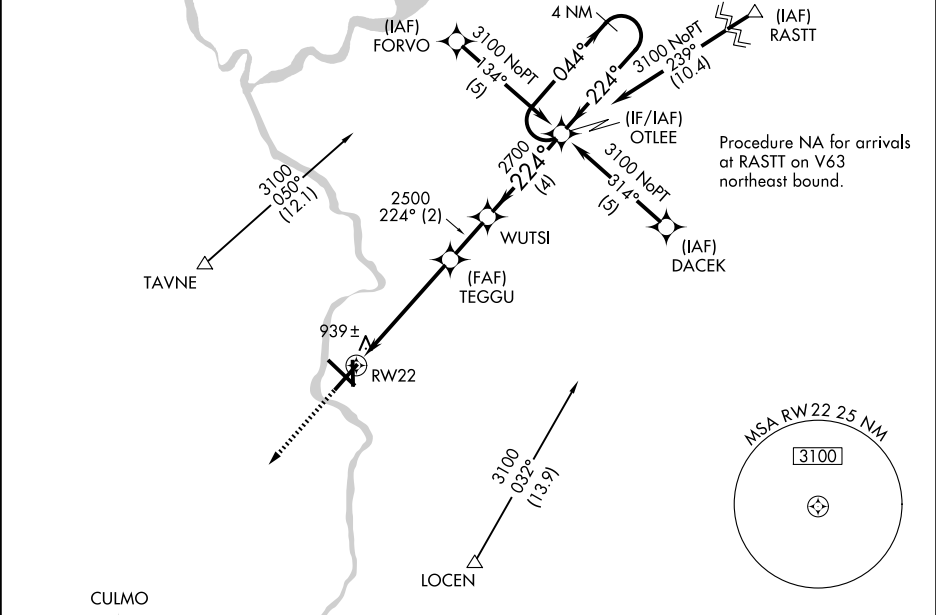

			
3100 ↑	CULMO 	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 45).	
* LNAV only.	* 1.4 NM to RW22	4 NM Holding Pattern	
		TEGGU 2500 	WUTSI 2700 
1.4 NM		3.7 NM	2 NM
A		B	C
OTLEE 3100 ← 224°	4 NM Holding Pattern		
GP 3.00° TCH 60			
CATEGORY			
LPV DA	1120-1 315 (400-1)		
LNAV/VNAV DA	1244-1½ 439 (500-1½)		
LNAV MDA	1320-1 515 (600-1)	1320-1½ 515 (600-1½)	1320-1¾ 515 (600-1¾)
CIRCLING	1320-1 512 (600-1)	1420-1¾ 612 (700-1¾)	1460-2 652 (700-2)

