


WAAS CH 72801 W12A	APP CRS 128°	Rwy Ldg TDZE Apt Elev	8399 873 873
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

WATERLOO RGNL (A.O)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 3400 direct KUCTE and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats to RVR 5500. # RVR 1800 authorized with use of FD or AP or HUD to DA.	AS	

ATIS 120.65	DES MOINES APP CON ★ 118.9 251.15	WATERLOO TOWER ★ 125.075 (CTAF) 257.8	GND CON 121.9 269.1	UNICOM 122.95
-----------------------	---	---	-------------------------------	-------------------------

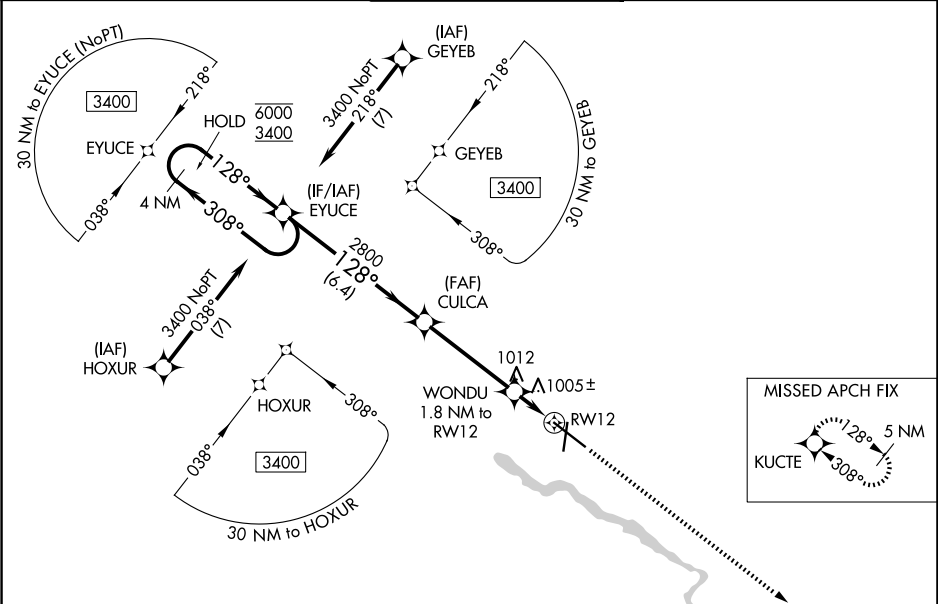

					ELEV 873		D		TDZE 873		
4 NM Holding Pattern EYUCE 6000 ← 308° 3400 → 128° GP 3.00° TCH 55					CULCA 2800 WONDU 1.8 NM to RW12 *1500 *1 NM to RW12 RW12 *LNAV only 3400 KUCTE		128° AS 81 8399 X 150 6003 X 150 36 TWR AS				
CATEGORY		A		B		C		D			
LPV DA#		1073/24 200 (200-½)									
LNAV/VNAV DA		1252/30 379 (400-¾)									
LNAV MDA		1260/24 387 (400-½)				1260/35 387 (400-¾)					
CIRCLING		1360-1 487 (500-1)		1400-1 527 (600-1)		1480-1¾ 607 (700-1¾)		1600-2¼ 727 (800-2¼)			
HIRL Rwy 12-30											
MIRL Rwy 18-36											
REIL Rws 18 and 36											