

LOC I-AHN	APP CRS	Rwy Ldg	6122
110.95	274°	TDZE	813
		Apt Elev	813

ILS or LOC/DME RWY 27



ATHENS/BEN EPPS (AHN)

⚠ Night landing: Rwy 2, 20 NA. DME from AHN VOR/DME. Simultaneous reception of I-AHN and AHN DME Required. VDP NA with Winder altimeter setting. When local altimeter setting not received, use Winder altimeter setting: increase DA to 1071 feet; increase all MDA 60 feet and S-LOC 27 visibility Cats C and D to 1 SM and Circling Cat D visibility to 2¼ SM. For inop MALSF, increase S-LOC 27 all Cats visibility to 1 mile. For inop MALSF when using Winder altimeter setting, increase S-ILS 27 all Cats visibility to ¾ mile and increase S-LOC 27 Cats A and B visibility to 1 mile, and Cats C and D to 1½ mile. Inop table does not apply to S-ILS 27.

MALSF

⚠ MISSED APPROACH:
Climb to 1500 then climbing left turn to 2500 on heading 060° and AHN VOR/DME R-092 to VESTO INT/ AHN 23.6 DME and hold.

ASOS	ATLANTA APP CON *	ATHENS TOWER *	GND CON	UNICOM
132.875	132.475 291.1	126.3 (CTAF) 0 338.275	121.8	122.95

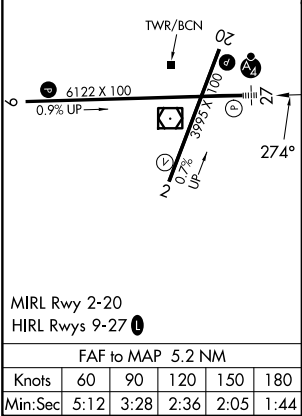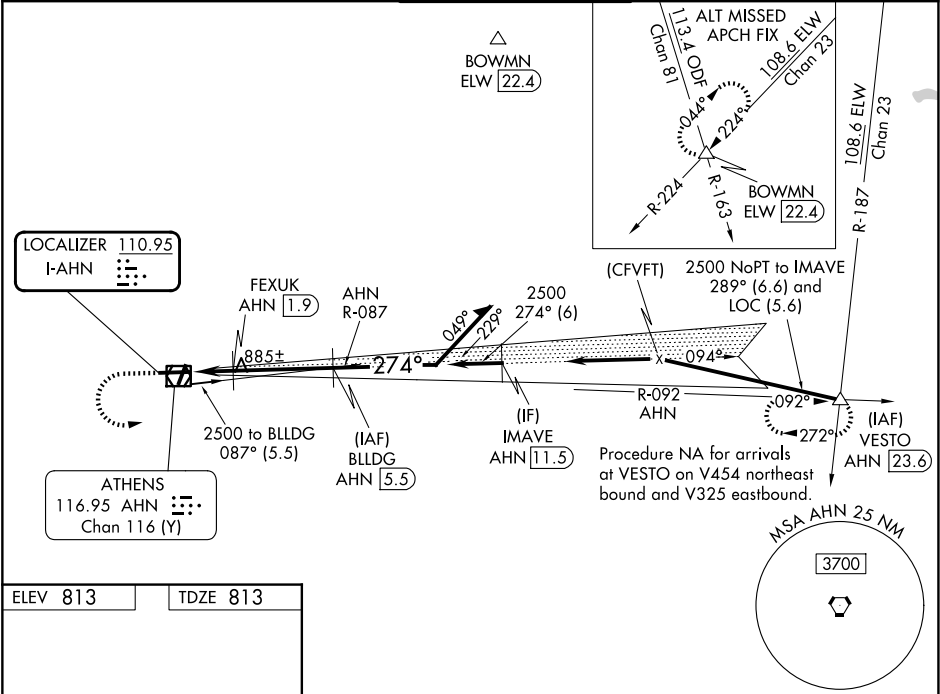

1500	2500	AHN	VESTO	BLDG	Remain within 10 NM
↑	hdg 060°	R-092	△	AHN 5.5	
* LOC only					
* AHN 1.2					
* 1360					
0.9 NM 0.7 NM 3.6 NM					
CATEGORY	A	B	C	D	
S-ILS 27	1013-¾ 200 (200-¾)				
S-LOC 27	1160-¾ 347 (400-¾)				
CIRCLING	1260-1 447 (500-1)	1280-1 467 (500-1)	1320-1½ 507 (600-1½)	1460-2 647 (700-2)	