

WAAS CH 69503 W27A	APP CRS 274°	Rwy Ldg 6122 TDZE 812 Apt Elev 812
--	------------------------	---

RNAV (GPS) RWY 27
ATHENS/BEN EPPS (AHN)

RNP APCH - GPS.



▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. For then local altimeter setting not received, use Winder altimeter setting: increase LPV DA to 1071 feet, increase LNAV/VNAV DA to 1011 feet, increase all MDA 60 feet and increase LNAV Cat C/D visibility to 1 mile and Circling Cat D visibility to 2 1/4 mile. For inop MALSF, increase LNAV/VNAV all Cats visibility to 1/2 mile, increase LNAV Cat C/D visibility to 1 mile. For inop MALSF when using Winder altimeter setting increase LPV all Cats visibility to 1/2 mile, increase LNAV/VNAV all Cats visibility to 1 mile, increase LNAV Cat C, D visibility to 1 1/2 mile. Baro-VNAV and VDP NA when using Winder altimeter setting. Inop table does not apply to LPV. Circling Rwy 2, 20 NA at night.

MALSF



MISSED APPROACH:
Climb to 2500 direct
SALIN and hold.

ASOS 132.875	ATLANTA APP CON ★ 132.475 291.1	ATHENS TOWER ★ 126.3 (CTAF) 0 338.275	GND CON 121.8	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

MISSED APCH FIX

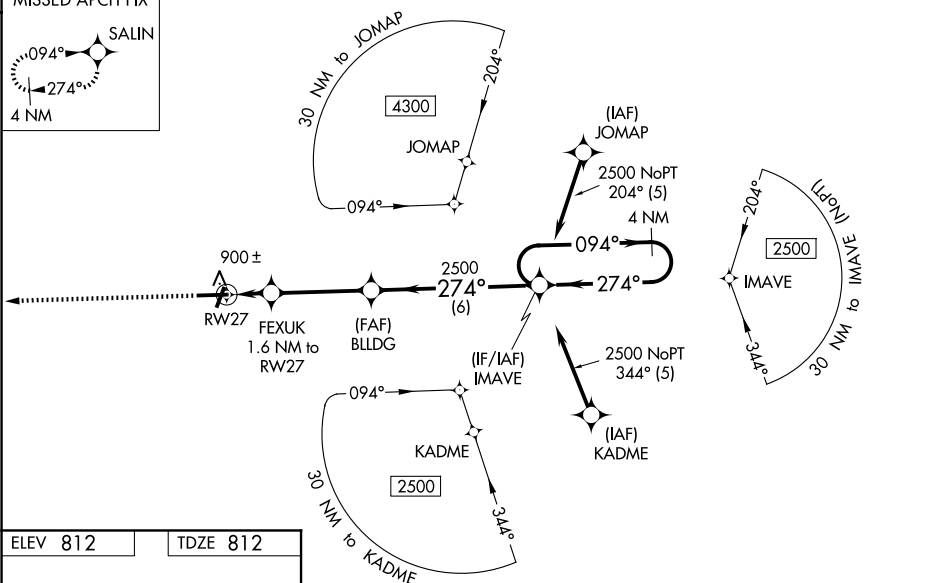

ELEV 812		TDZE 812
----------	--	----------

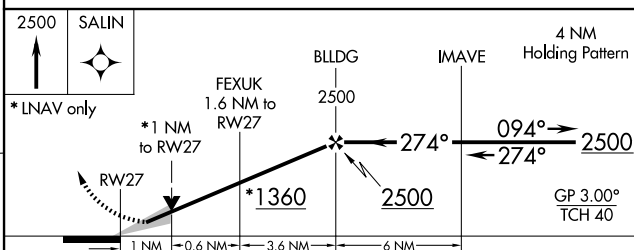

CATEGORY		A	B	C	D
LPV	DA	1012- $\frac{3}{4}$		200 (200- $\frac{3}{4}$)	
LNAV/ VNAV	DA	1064- $\frac{3}{4}$		252 (300- $\frac{3}{4}$)	
LNAV	MDA	1160- $\frac{3}{4}$		348 (400- $\frac{3}{4}$)	
CIRCLING		1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1 $\frac{1}{2}$ 508 (600-1 $\frac{1}{2}$)	1460-2 648 (700-2)

ATHENS, GEORGIA
Amdt 1B 07OCT21

33°57'N-83°20'W

ATHENS/BEN EPPS (AHN)
RNAV (GPS) RWY 27

SE-4, 27 NOV 2025 to 25 DEC 2025