


VOR/DME MFE	APP CRS	Rwy Ldg
117.2	134°	6983
Chan 119		TDZE 107
		Apt Elev 107

VOR RWY 14
MC ALLEN INTL (MFE)

⚠ Circling NA northeast of Rwy 14-32. ADF or DME required. For inop MALSR, increase S-14 Cat C/D visibility to 1½ mile. When local altimeter setting not received, use Weslaco altimeter setting and increase all MDA 40 feet and S-14 Cat C/D and Circling Cat C visibility ½ mile. VDP NA when using Weslaco altimeter setting.		MALSR	MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct MFE VOR/DME and hold.	
ATIS	VALLEY APP CON	MC ALLEN TOWER ★	GND CON	UNICOM
128.5	126.55 377.2	118.5 (CTAF) 0 256.9	121.8	122.95

ADF or DME REQUIRED

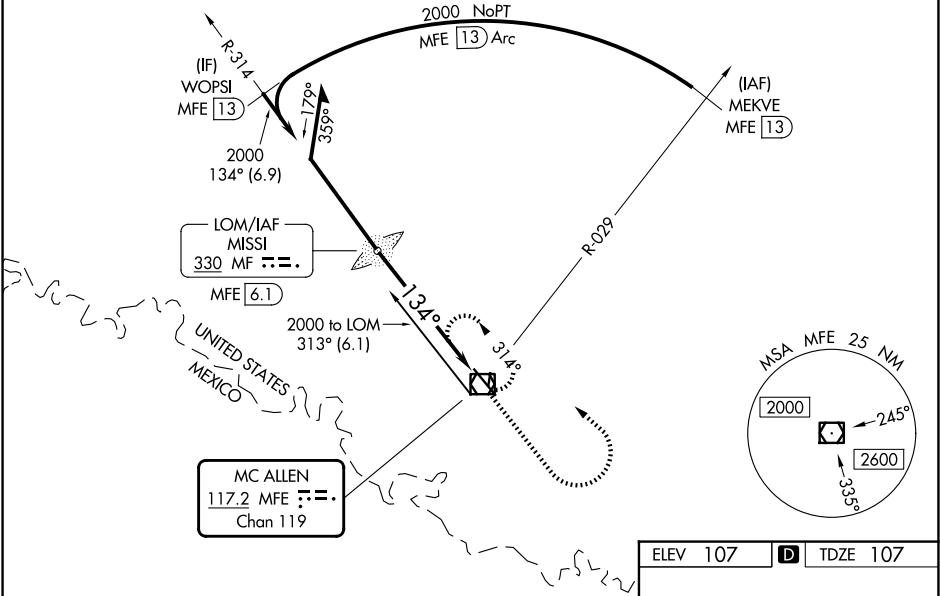

Remain within 10 NM		MISSI MF LOM MFE 6.1		1000	2000	MFE
2000		314°		134°	2000	
		3.15°		TCH 55	MFE 2.0	MFE 0.6
		4.1 NM		1.4		
CATEGORY	A	B	C	D		
S-14	620-1½	513 (600-½)	620-1	513 (600-1)		
CIRCLING	620-1	513 (600-1)	620-1½	800-2¼		
			513 (600-½)	693 (700-2¼)		

