

WAAS CH 49119 W19B	APP CRS 196°	Rwy Ldg TDZE Apt Elev	7302 1320 1333
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 19L

WICHITA DWIGHT D EISENHOWER NTL (ICT)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Simultaneous approach authorized with ILS or LOC RWY 19R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MALSR

MISSED APPROACH:
Climb to 3600 direct YELOO and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
-----------------------	---------------------------------------	-------------------------------------	-------------------------------

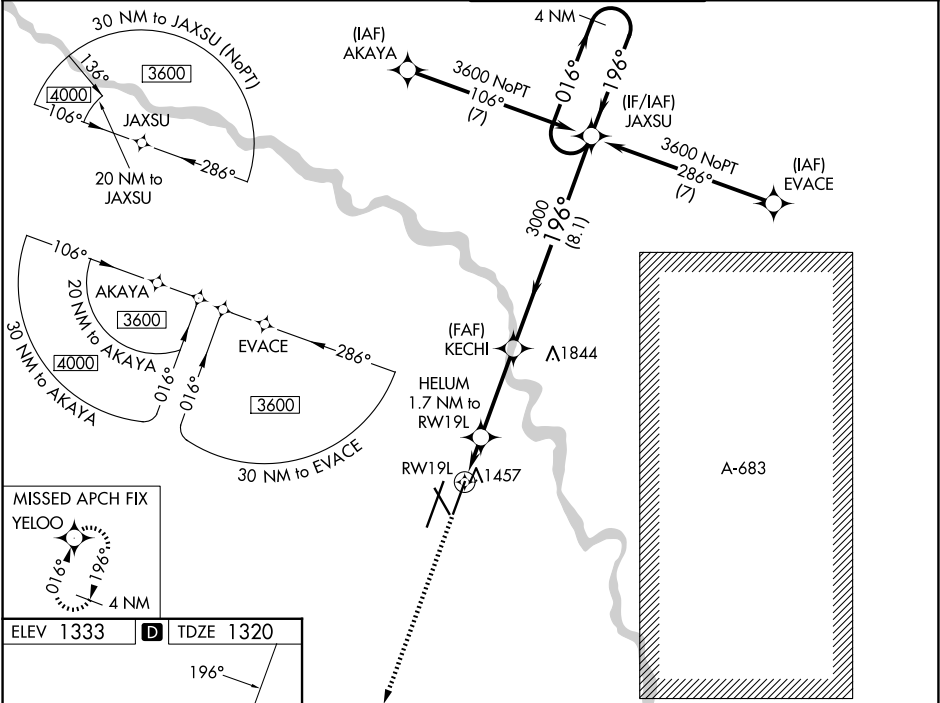

ELEV 1333	D	TDZE 1320
-----------	----------	-----------

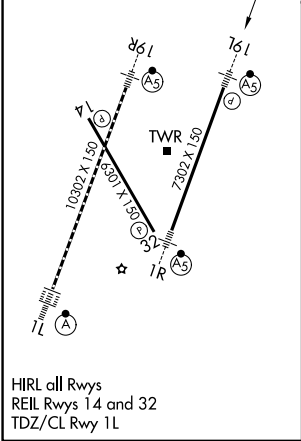

3600	YELOO	HELUM 1.7 NM to RWY 19L	KECHI	JAXSU	4 NM Holding Pattern
*LNAV only.		*1.1 NM to RWY 19L			
		1900*			GP 3.00° TCH 54
	1.1 NM	0.6	3.4 NM	8.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1520-½		200 (200-½)		
LNAV/VNAV DA	1747-¾		427 (500-¾)		
LNAV MDA	1780-½ 460 (500-½)		1780-¾ 460 (500-¾)		
CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)		1980-2 647 (700-2)

NC-2, 27 NOV 2025 to 25 DEC 2025

NC-2, 27 NOV 2025 to 25 DEC 2025