
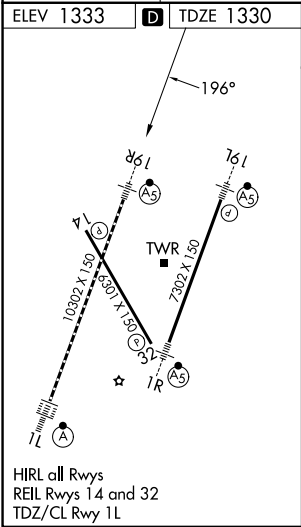



WAAS CH 63019 W19A	APP CRS 196°	Rwy Ldg TDZE 1330 Apt Elev 1333
--	------------------------	---

RNAV (GPS) Y RWY 19R
WICHITA DWIGHT D EISENHOWER NTL (ICT)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cat C/D visibility to RVR 6000. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR	MISSED APPROACH: Climb to 3600 direct CUTIK and hold.
--	--------------	--

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
-----------------------	---------------------------------------	-------------------------------------	-------------------------------

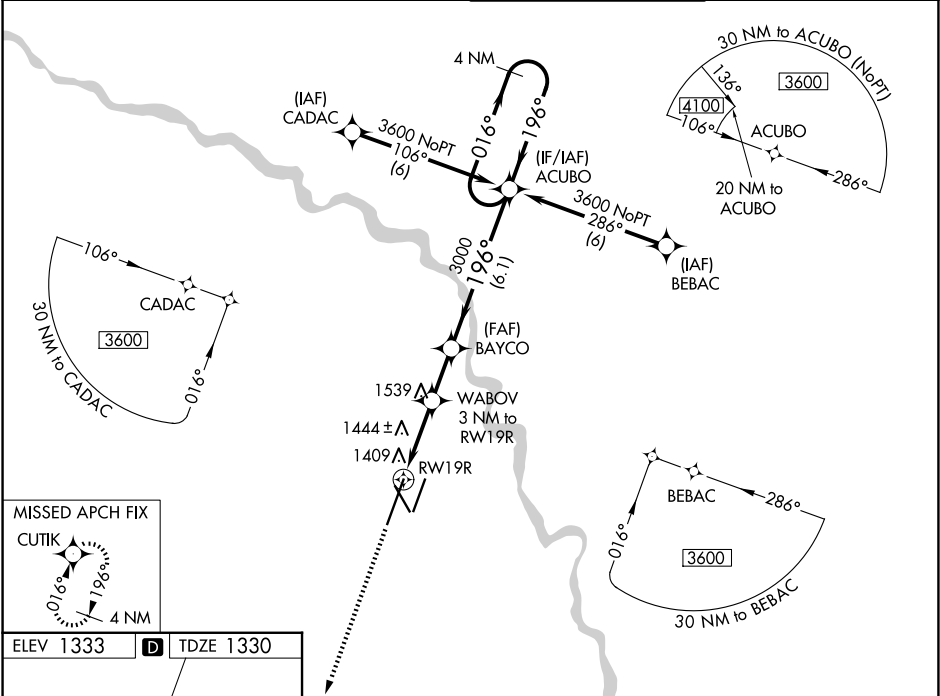

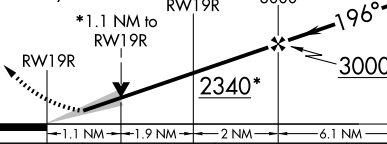3600	CUTIK	ACUBO	4 NM Holding Pattern	
				
*LNAV only.	WABOV 3 NM to RW19R	BAYCO 3000	016° → ← 196° 3600	
			GP 3.00° TCH 52	
CATEGORY	A	B	C	D
LPV DA #	1530/24 200 (200-½)			
LNAV/ VNAV DA	1742/45 412 (500-¾)			
LNAV MDA	1740/24 410 (500-½)	1740/40 410 (500-¾)		
CIRCLING	1800-1 467 (500-1)	1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	