

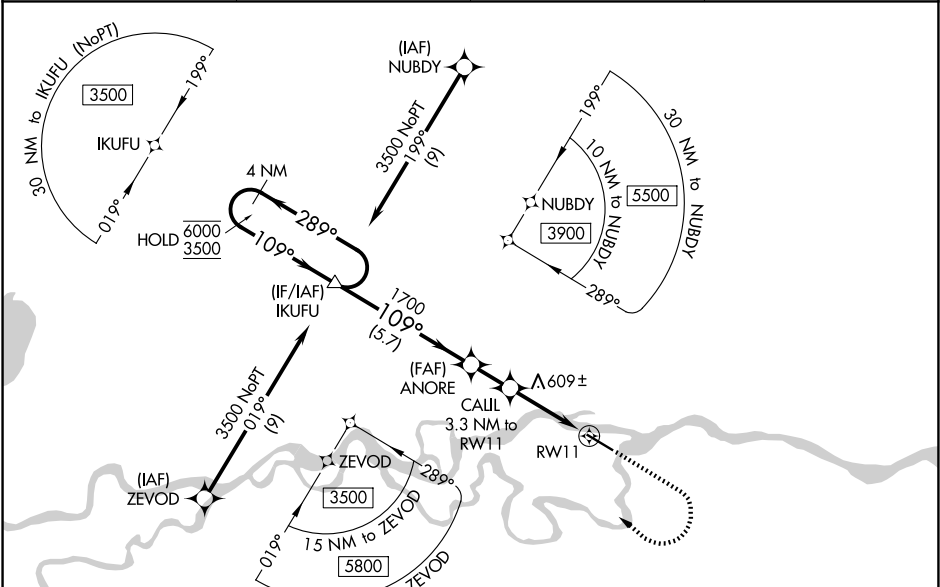
WAAS CH 45838 W11A	APP CRS 109°	Rwy Ldg 5400 TDZE 97 Apt Elev 97
--	------------------------	---


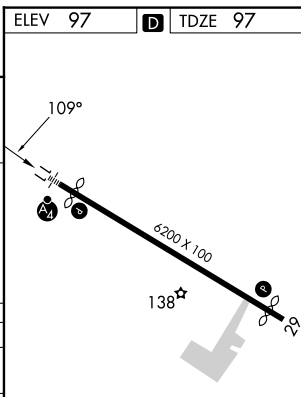
RNAV (GPS) RWY 11

ANIAK (ANI)(PANI)

RNP APCH.	⚠ ⚠ ❄ -37°C Circling NA north of Rwy 11-29. Rwy 11 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV, LNAV/VNAV all Cats, LNAV Cat A. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 2 ½ SM.	MALSF ⚠ MISSED APPROACH: Climb to 1500 then climbing right turn to 3500 direct IKUFU and hold, continue climb-in-hold to 3500.
-----------	---	--

AWOS-3P 124.3	ANCHORAGE CENTER 118.15 251.05	CLNC DEL 118.15	CTAF 122.1 
-------------------------	--	---------------------------	--



		ELEV 97		D TDZE 97	
					
4 NM Holding Pattern		1500 3500 IKUFU			
6000 3500		*LNAV only			
GP 3.00° TCH 35		*2.3 NM to RW11			
ANORE 1700		RW11			
CAUL 3.3 NM to RW11		*1160			
5.7 NM		1.6 NM 1 NM 2.3 NM			
CATEGORY	A	B	C	D	
LPV DA	347-1 250 (300-1)				
LNAV/VNAV DA	994-4 897 (900-4)				
LNAV MDA	860-1 763 (800-1)		860-2 763 (800-2)		
CIRCLING	860-1 763 (800-1)	860-1¼ 763 (800-1¼)	860-2½ 763 (800-2½)	1200-3 1103 (1200-3)	
HIRL Rwy 11-29 					