
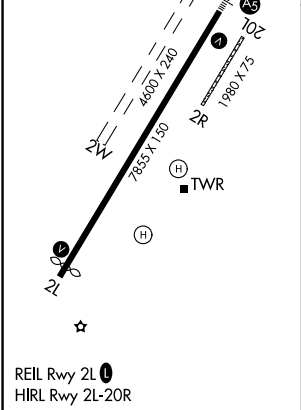


|                                                 |                        |                                                              |
|-------------------------------------------------|------------------------|--------------------------------------------------------------|
| LOC/DME I-ENA<br><b>108.9</b><br>Chan <b>26</b> | APP CRS<br><b>196°</b> | Rwy Ldg <b>7575</b><br>TDZE <b>98</b><br>Apt Elev <b>100</b> |
|-------------------------------------------------|------------------------|--------------------------------------------------------------|

ILS Y or LOC Y RWY 20R  
KENAI MUNI (ENA) (PAEN)

|                                                                                                                                                                                                                                                           |       |                                                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TACAN required.                                                                                                                                                                                                                                           | MALSR | MISSED APPROACH: Climb to 1800 then climbing right turn to 4000 on heading 046° and on EDF TACAN R-212 to TBONE INT/EDF 49.2 DME and hold.<br>† Missed approach requires minimum climb of 800 feet per NM to 4000; if unable to meet climb gradient, see ILS Z or LOC Z RWY 20R. |
| ⚠ Circling NA to Rwy 2W and 20W. Circling Rwy 2R, 20L NA at night. For inop ALS, increase S-ILS 20R Cat E visibility to RVR 4000. For inop ALS, increase S-LOC 20R Cat E visibility to 1¼ SM.<br># RVR 1800 authorized with use of FD or AP or HUD to DA. |       |                                                                                                                                                                                                                                                                                  |

|                       |                                        |                                             |                          |                              |
|-----------------------|----------------------------------------|---------------------------------------------|--------------------------|------------------------------|
| ATIS<br><b>133.35</b> | ANCHORAGE CENTER<br><b>125.7 379.1</b> | KENAI TOWER★<br><b>121.3 (CTAF) 0 239.3</b> | GND CON<br><b>118.75</b> | KENAI RADIO<br><b>122.65</b> |
|-----------------------|----------------------------------------|---------------------------------------------|--------------------------|------------------------------|

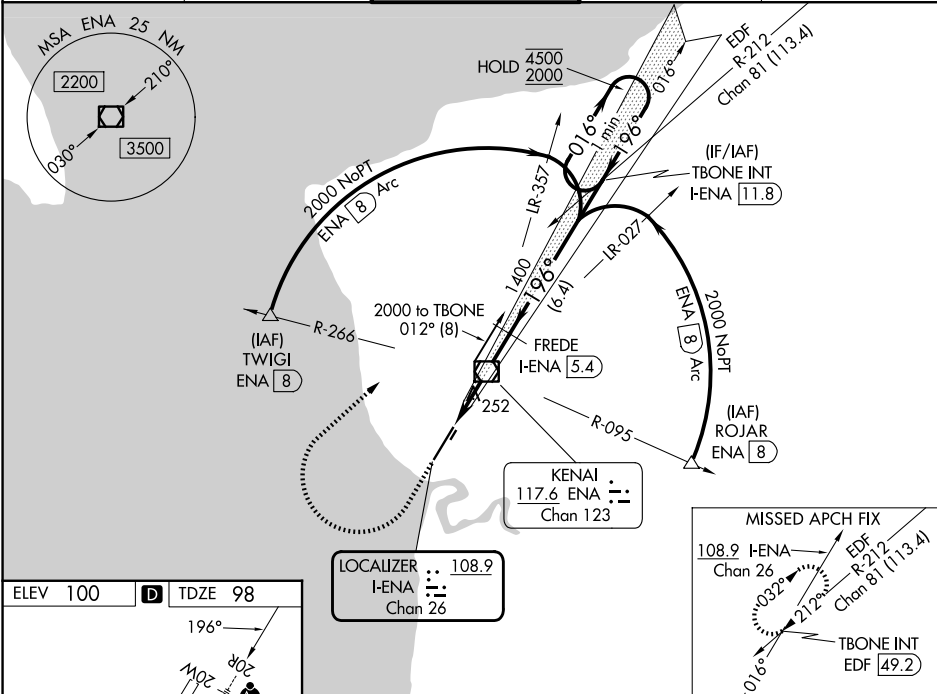

|              |                      |                      |                        |                                             |                               |
|--------------|----------------------|----------------------|------------------------|---------------------------------------------|-------------------------------|
| 1800<br>↑    | 4000<br>hdg<br>046°  | EDF<br>R-212         | TBONE<br>INT           | Use I-ENA DME when on the localizer course. |                               |
|              |                      |                      |                        | TBONE INT<br>I-ENA 11.8                     | One Minute<br>Holding Pattern |
| *LOC only    |                      |                      | FREDE<br>I-ENA 5.4     | 1400                                        | 016° → 4500<br>← 196° 2000    |
| I-ENA 1.4    |                      | *I-ENA 2.6           | 1400                   | 196°                                        | GS 3.00°<br>TCH 51            |
| 1.2 NM       |                      | 2.8 NM               | 6.4 NM                 |                                             |                               |
| CATEGORY     | A                    | B                    | C                      | D                                           | E                             |
| S-ILS 20R #† | 298/24 200 (200-½)   |                      |                        |                                             |                               |
| S-LOC 20R †  | 520/24 422 (500-½)   |                      | 520/40 422 (500-¾)     |                                             |                               |
| CIRCLING     | 560-1<br>460 (500-1) | 580-1<br>480 (500-1) | 580-1½<br>480 (500-1½) | 680-2<br>580 (600-2)                        | 760-2¼<br>660 (700-2¼)        |

AK, 27 NOV 2025 to 22 JAN 2026

AK, 27 NOV 2025 to 22 JAN 2026