

LOC I-CDB 110.3	APP CRS 146°	Rwy Ldg 10179 TDZE 75 Apt Elev 100
---------------------------	------------------------	---

ILS or LOC RWY 15
COLD BAY (CDB) (PACD)

DME required.

⚠ Circling NA for Cats B/C/D southwest of Rwy 15-33. DME from CDB VORTAC.


⚠ Simultaneous reception of I-CDB and CDB DME required. DME values will decrease then increase prior to reaching missed approach point. Circling NA for Cat A southwest of Rwy 15-33 at night. For inop ALS, increase S-LOC 15 Cats C and D visibility to RVR 5500. #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

AS

MISSED APPROACH: Climb to 1100 then climbing left turn to 2700 direct CDB VORTAC and hold, continue climb-in-hold to 2700.

ASOS 135.75	ANCHORAGE CENTER 118.5 278.3	COLD BAY RADIO 123.6 (CTAF) 0
-----------------------	--	---

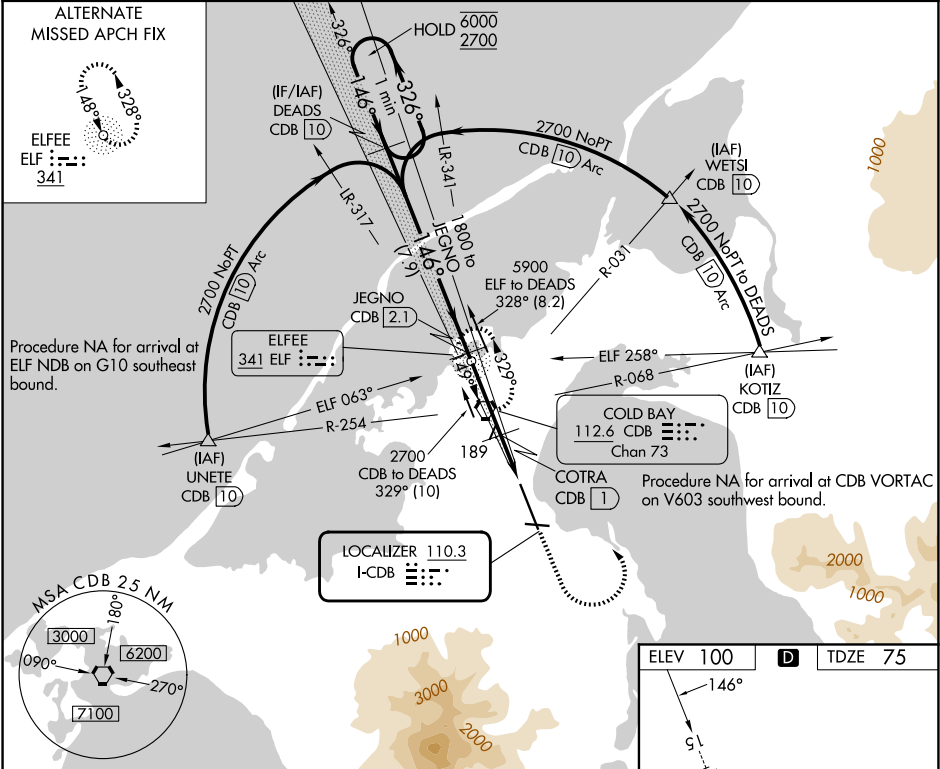

One Minute Holding Pattern 6000 2700 ←326° →146° GS 3.10° TCH 55°		DEADS CDB 10		JEGNO CDB 2.1 CDB VORTAC		1100 ↑	2700 ↷	CDB
		1800		1800		COTRA CDB 1	*CDB 2	*LOC only.
		1800		*760		CDB 3	CDB 3	
		7.9 NM		3.1 NM		1 NM	1 NM	
		A		B		C		D
CATEGORY								
S-ILS 15 #	275/24 200 (200-½)							
S-LOC 15	440/24 365 (400-½)		440/35 365 (400-¾)					
CIRCLING	540-1		560-1		560-1½		860-2½	
	440 (500-1)		460 (500-1)		460 (500-1½)		760 (800-2½)	

