

APP CRS
063°

Rwy Ldg
11014

TDZE
256

Apt Elev
305


RNAV (GPS) Y RWY 6L
GUAM INTL (GUM)(PGUM)

RNP APCH - GPS.
Circling NA southeast of Rwy 6R-24L.
For inop ALS, increase Cat C and D visibility to 1 3⁄8 SM.

MALSR

MISSED APPROACH: Climb to 3000 direct WABOX and hold.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4
----------------------	----------------------------------	-----------------------------------	-------------------------------

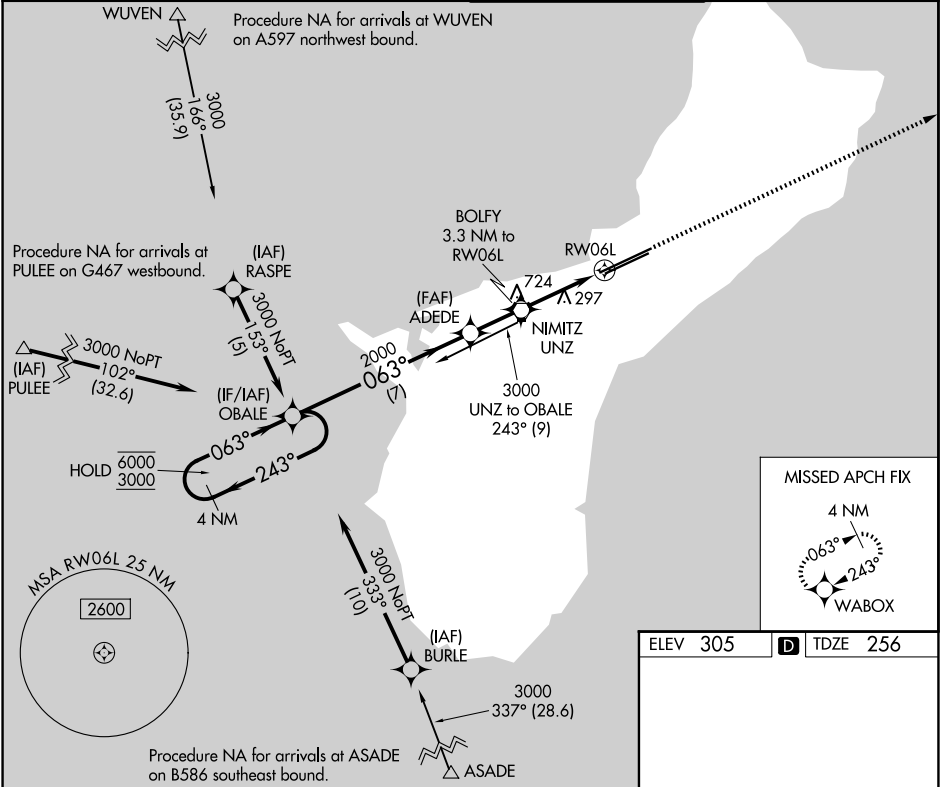

4 NM Holding Pattern

6000 3000 243° 063°

OBACLE

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 73).

2000

1480

7 NM 2 NM 2 NM 1.3 NM

WABOX

3000

OBACLE

3.35° TCH 68

BOLFY 3.3 NM to RW06L

1.3 NM to RW06L

RW06L

0.5% UP - 0.7% DOWN

12014 x 1.50

0.8% UP - 0.6% DOWN

TWR

063°

CATEGORY	A	B	C	D
LNAV MDA	720-1 464 (500-1)	720-1 464 (500-1)	720-1 464 (500-1)	720-1 464 (500-1)
CIRCLING	880-1 575 (600-1)	880-1 575 (600-1)	940-1 635 (700-1 3⁄4)	NA

HIRL all Rwys