


APP CRS	Rwy Ldg	4500
241°	TDZE	24
	Apt Elev	29

RNAV (GPS) RWY 24
POINT LAY LRRS (PIZ)(PPIZ)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2400 direct ZUVOG and hold.
33 -33°C When local altimeter setting not received, procedure NA.	

AWOS-3P 135.65	ANCHORAGE CENTER 119.65 363.25	BARROW RADIO 122.4	CTAF 122.8 0
-------------------	-----------------------------------	-----------------------	-----------------

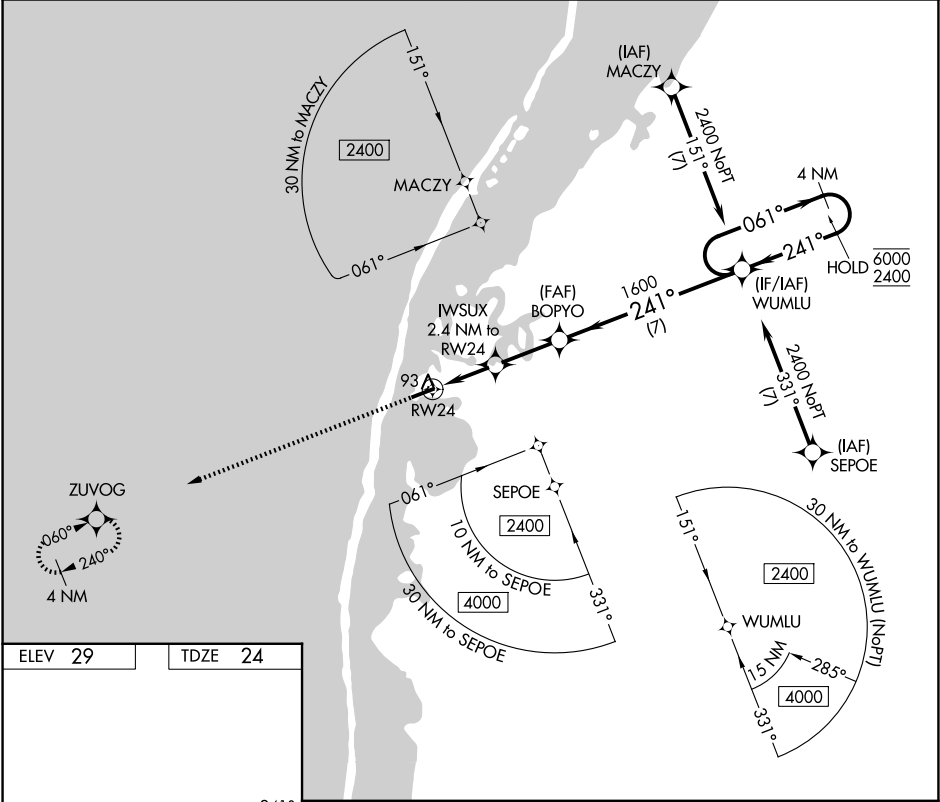

ELEV 29	TDZE 24				
ZUVOG		IWSUX 2.4 NM to RW24	BOPYO	WUMLU	4 NM Holding Pattern
1.1 NM to RW24		≤ 3.00° TCH 35	1600	061° → 6000	← 241° 2400
1.1		1.3 NM	2.5 NM	7 NM	
CATEGORY	A	B	C	D	
LNAV MDA	400-1 376 (400-1)				NA
CIRCLING	440-1 411 (500-1)	480-1 451 (500-1)	480-1½ 451 (500-1½)	NA	