

WAAS
CH **40003**
W20A

APP CRS
198°

Rwy Idg
TDZE **1354**
Apt Elev **1359**

RNAV (GPS) RWY 20

ROGERS EXEC - CARTER FLD (R0G)

RNP APCH-GPS.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.

MALSR
45

MISSED APPROACH: Climb to 3100 direct HONON and hold.

AWOS-3PT
134.375



RAZORBACK APP CON*
126.6 305.2

ROGERS TOWER*
119.375 (CTAF)

GND CON
118.0

CLNC DEL
121.75

CLNC DEL
121.75
(When twr closed)

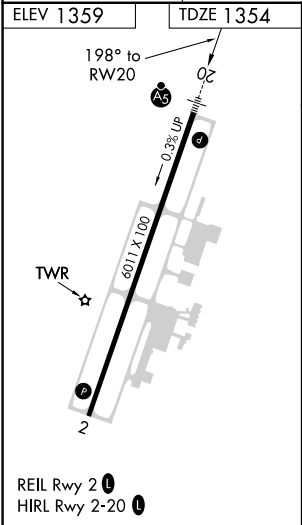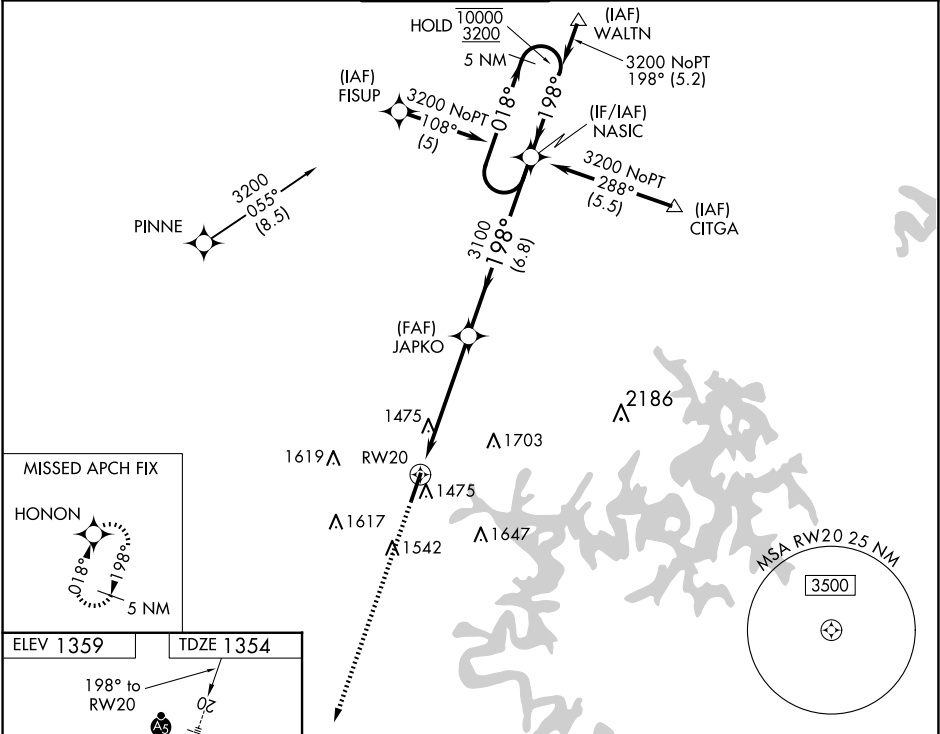

3100	HONON	VGSI and RNAV glidepath not coincident (VGSI angle 3.00/TCH 55).			5 NM Holding Pattern
		JAPKO	3100	198°	10000/3200
		RW20	1.1 NM to RW20	198°	
			1.1 NM	4.2 NM	6.8 NM
CATEGORY	A	B	C	D	
LPV DA		1604-½	250 (300-½)		
LNAV/VNAV DA		1720-⅝	366 (400-⅝)		
LNAV MDA	1740-½	386 (400-½)	1740-⅝	386 (400-⅝)	
CIRCLING	1840-1	481 (500-1)	2020-1¾ 661 (700-1¾)	2020-2 661 (700-2)	