
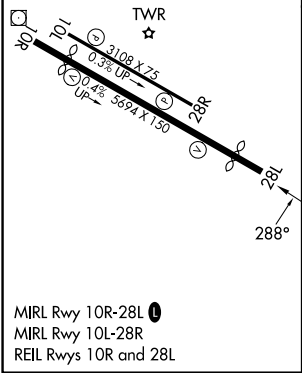


LOC/DME I-HWD 111.5 Chan 52	APP CRS 288°	Rwy Ldg TDZE Apt Elev 5018 50 52
---	------------------------	--

LOC RWY 28L
HAYWARD EXEC (HWD)

DME required.		MISSED APPROACH: Climb to 2100 direct OAK VOR/DME and hold.			
ATIS 126.7	NORCAL APP CON 124.4 351.8	HAYWARD TOWER ★ 120.2 (CTAF) 257.8	GND CON 121.4	CLNC DEL 128.05	UNICOM 122.95

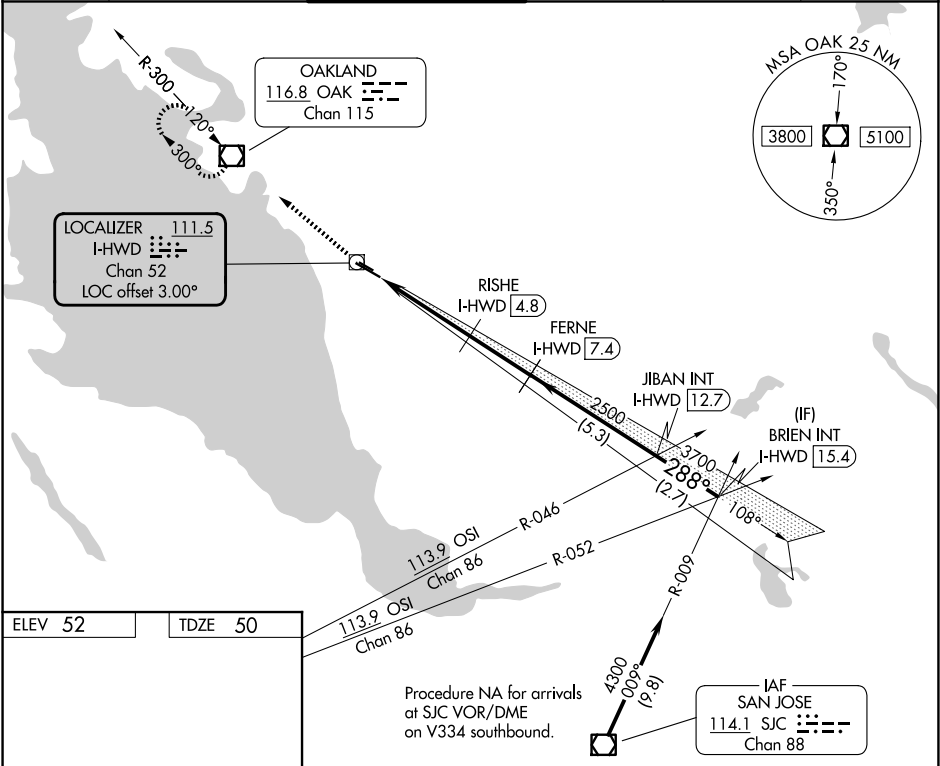

2100	OAK	VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 35).				BRIEN INT I-HWD 15.4	
							
				JIBAN INT I-HWD 12.7		4300	
				FERNE I-HWD 7.4		3700	
				RISHE I-HWD 4.8		288°	
				I-HWD 1.8		2500	
				I-HWD 0.9		1560	
				3.44° TCH 55			
		1 NM		3 NM		2.6 NM	
				5.3 NM		2.7 NM	
CATEGORY		A		B		C	
S-28L		500-1		450 (500-1)		500-1 3/8 450 (500-1 3/8)	
CIRCLING		540-1		488 (500-1)		540-1 1/2 488 (500-1 1/2) 920-2 3/4 868 (900-2 3/4)	