

WAAS CH 56531 W25A	APP CRS 249°	Rwy Ldg TDZE 790 Apt Elev 812
--	------------------------	---


RNAV (GPS) RWY 25
CAPITAL CITY (F'TT)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase all LPV DA to 1160 feet and LNAV/VNAV DA to 1171 feet and all LPV visibilities ¼ mile, all LNAV/VNAV visibilities ½ mile; increase all MDAs 80 feet and visibility Cats C and D ¼ mile. VDP and Baro-VNAV NA with Lexington altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
DEXLO and hold.

ASOS 119.275	LEXINGTON APP CON 120.75 298.9	CLNC DEL 118.65	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------	---------------------------------

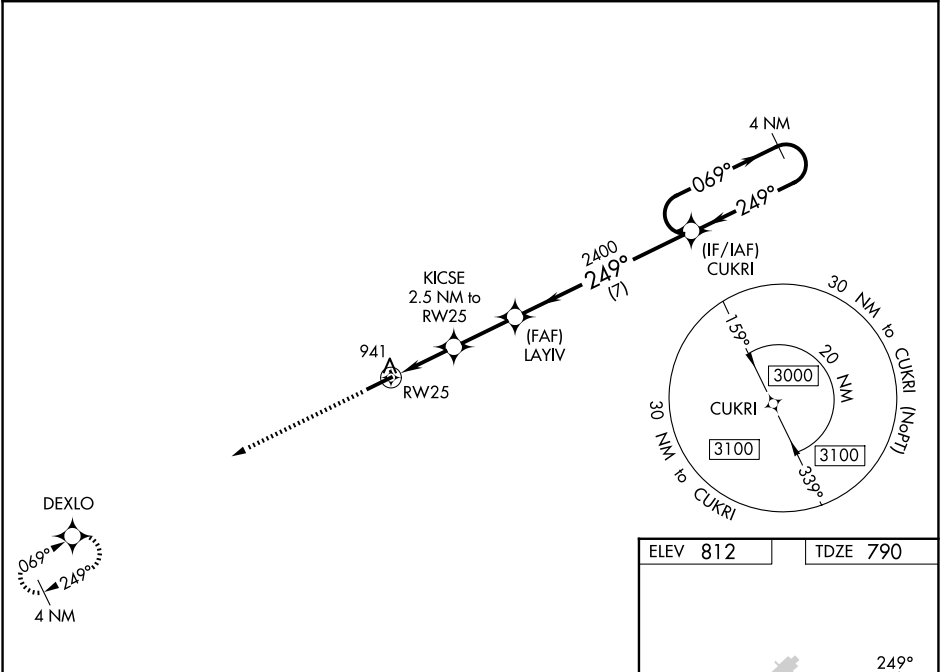

3000

DEXLO

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.50/TCH 31).

KICSE 2.5 NM to RW25

LAYIV 2400

CUKRI 4 NM Holding Pattern

*LNAV only.

*1.2 NM to RW25

*1620

2400

3000

GP 3.00° TCH 45

	1.2 NM	1.3 NM	2.4 NM	7 NM
CATEGORY	A	B	C	D
LPV DA	1098-1 308 (300-1)			
LNAV/VNAV DA	1109-1 319 (300-1 ½)			
LNAV MDA	1200-1	410 (400-1)	1200-1 ½	410 (400-1 ½)
CIRCLING	1280-1 468 (500-1)	1380-1 568 (600-1)	1440-1 ¾ 628 (700-1 ¾)	1440-2 628 (700-2)

ELEV 812

TDZE 790

MRL Rwy 7-25 0

REIL Rwy 7 and 25 0

SE-1, 27 NOV 2025 to 25 DEC 2025

SE-1, 27 NOV 2025 to 25 DEC 2025