
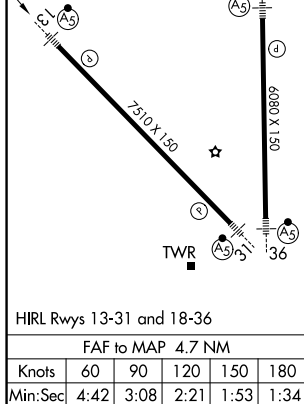


ILS or LOC RWY 13
CORPUS CHRISTI INTL (CRP)

- | | |
|---|--|
| <p>T Autopilot coupled approach NA below 260.
 A For inop ALS, increase S-LS 13 Cat E visibility to RVR 4000 and S-LOC 13 Cats C, D, and E visibility to RVR 5500.
 *RVR 1800 authorized with use of FD or AP or HUD to DA.</p> | <p>MALSR</p>  <p>MISSED APPROACH: Climb to 500 then climbing right turn to 2000 on heading 132° and CRP VORTAC R-169 to SOLON INT/CRP VORTAC 28 DME and hold.</p> |
|---|--|

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

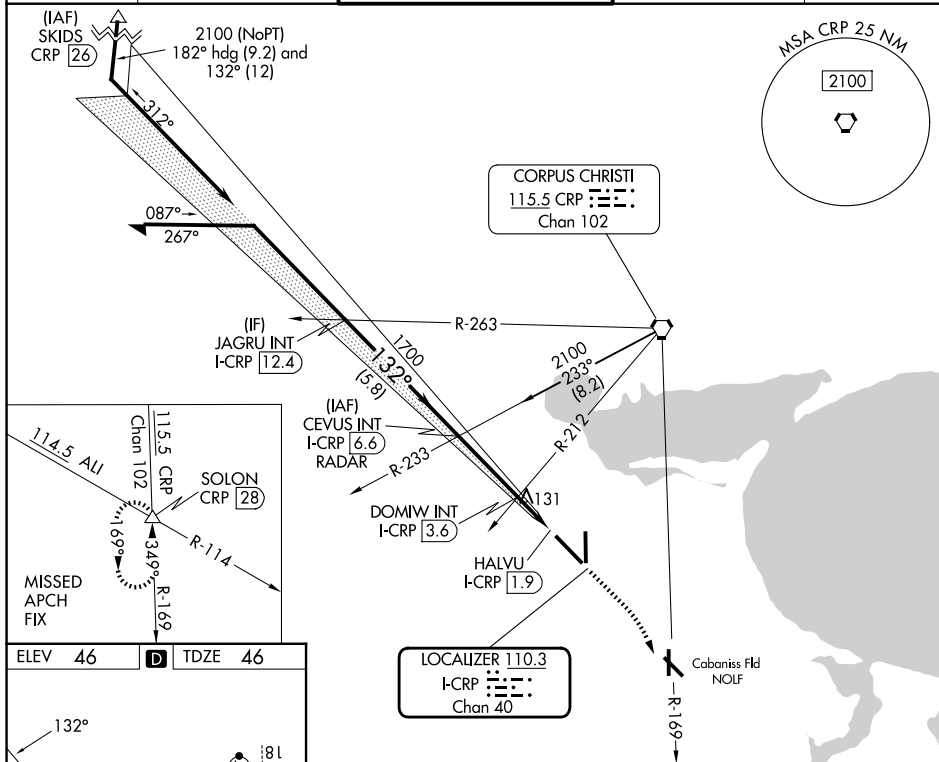

Remain within 15 NM

CEVUS INT I-CRP 6.6

500

2000

SOLON

hdg 132° CRP R-169

2100

312°

132°

GS 3.00° TCH 50

Use I-CRP DME when on the localizer course.

1700

720

DOMTW INT I-CRP 3.6

I-CRP 2.5

HALVU I-CRP 1.9

3 NM

1.1

0.6

0.3

CATEGORY	A	B	C	D	E
S-ILS 13*	246/24 200 (200-½)				
S-LOC 13	400/24	354 (400-½)	400/30 354 (400-⅔)		
CIRCLING	500-1 454 (500-1)	780-1 734 (800-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)