

LOC/DME I-OYC 109.5 Chan 32	APP CRS 355°	Rwy Ldg 6080 TDZE 40 Apt Elev 46
---	------------------------	---

ILS or LOC RWY 36
CORPUS CHRISTI INTL (CRP)



DME required.

T For inop ALS, increase S-LS 36 Cat E visibility to RVR 4000 and S-LOC 36 Cat C/D/E visibility to RVR 4500.

MALSR

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 on heading 338° and CRP VORTAC R-287 to ATHIS INT/CRP 23.3 DME and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
---------------	---------------------------------	-----------------------------	-------------------------	--------------------

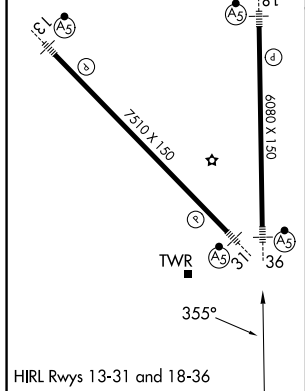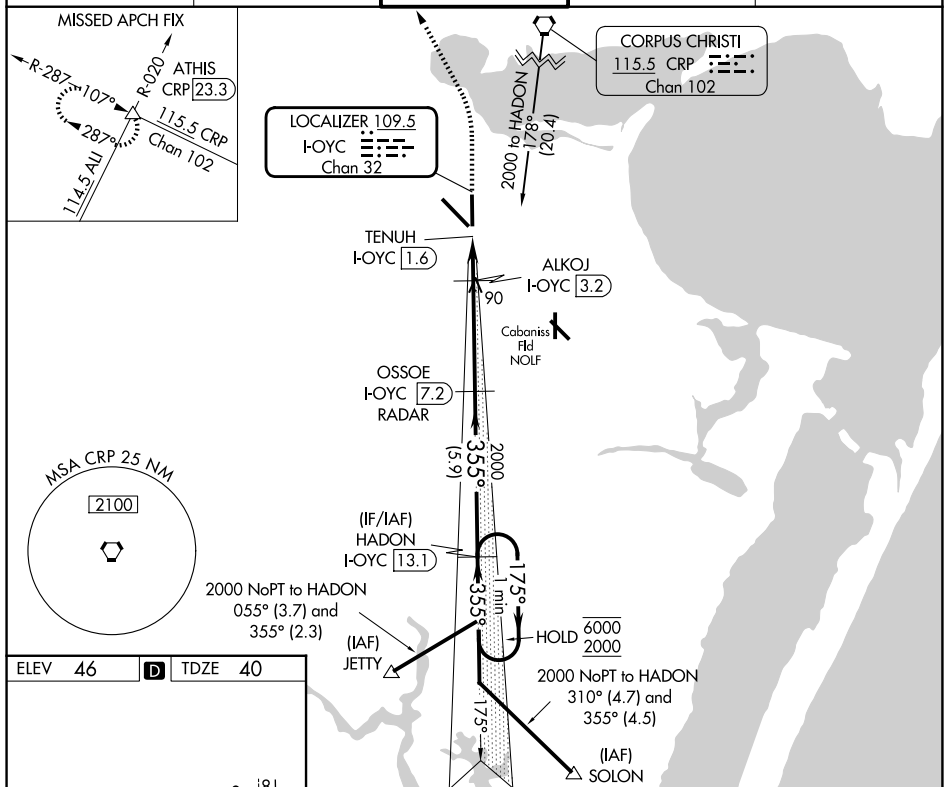

700 ↑	2000 hdg 338°	CRP R-287	ATHIS △	ILS unusable inside DA. LOC unusable within 1.6 DME.				
				OSSOE I-OYC <u>7.2</u> RADAR	HADON I-OYC <u>13.1</u>		One Minute Holding Pattern	
CATEGORY	A		B		C		D	E
S-ILS 36			240/24		200 (200-½)			
S-LOC 36			340/24		300 (300-½)			
CIRCLING	500-1 454 (500-1)	780-1 734 (800-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)	820-2¾ 774 (800-2¾)		