

APP CRS	Rwy Ldg	6080
355°	TDZE	40
	Apt Elev	44

RNAV (RNP) Z RWY 36
CORPUS CHRISTI INTL (CRP)


T For uncompensated Baro-VNAV systems, procedure NA below -1°C (-31°F) or above 54°C (130°F). GPS required. For inop MALS, increase RNP 0.11 visibility all Cats to RVR 4000. For inop MALS, increase RNP 0.30 visibility all Cats to RVR 5900.

MALSR




MISSED APPROACH: Climb to 2000 on track 355° to EXIKE and on track 294° to ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
---------------	---------------------------------	-----------------------------	-------------------------	--------------------

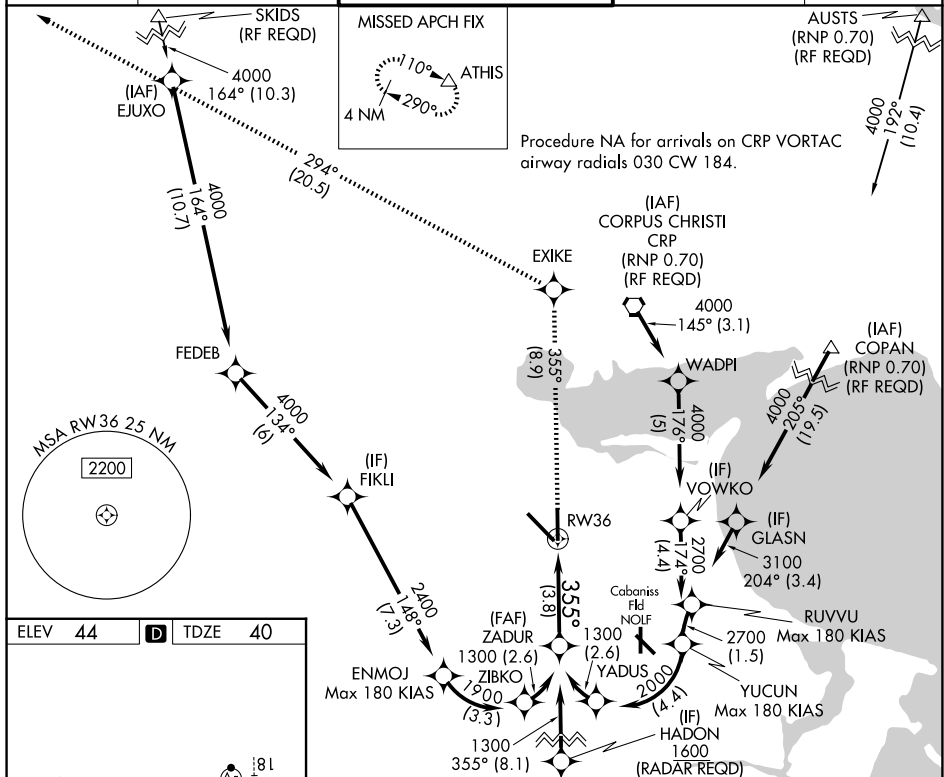

ELEV 44	D	TDZE 40
---------	----------	---------

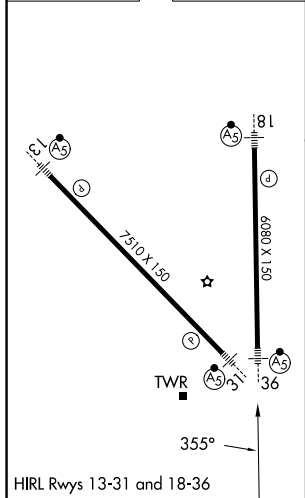

2000 ↑ tr 355°	EXIKE ✱	tr 294°	ATHIS △	See Planview for multiple IF locations.	ZADUR 1300	
CATEGORY	A		B	C	D	
RNP 0.11 DA			290/24	250 (300-½)		
RNP 0.30 DA			400/34	360 (400-⅝)		

CORPUS CHRISTI, TEXAS
Amdt 1B 28NOV24

27°46'N-97°30'W

CORPUS CHRISTI INTL (CRP)
RNAV (RNP) Z RWY 36