

WAAS
CH **40301**
W35A


APP CRS
348°

Rwy Idg
TDZE **21**
Apt Elev **24**

RNAV (GPS) RWY 35

ACADIANA RGNL (ARA)

RNP APCH.				MALSR	MISSED APPROACH: Climb to 440 then climbing right turn to 2000 direct LULEW and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM and LNAV Cats C/D visibility to 1 SM. Circling NA to Rwys 17W and 35W.							
ASOS	LAFAYETTE APP CON★	ACADIANA TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM	
133.325	121.1 268.7	125.0 (CTAF) 239.3	121.7	121.7	118.05 (when twr closed)	122.95	122.7

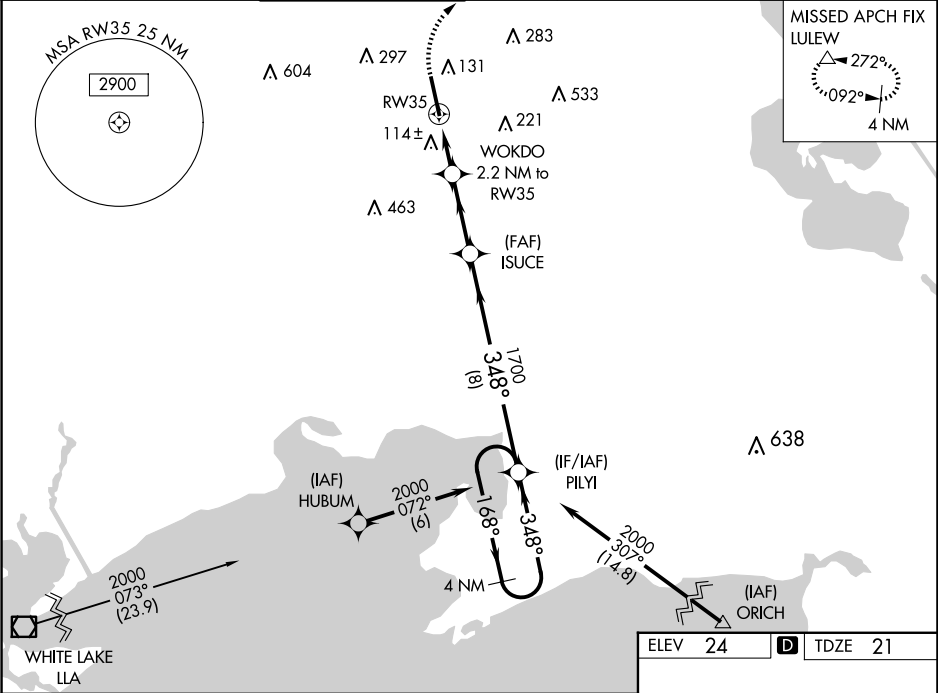

440 2000 LULEW		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).		4 NM Holding Pattern	
*LNAV only.		ISUCE		1700	
WOKDO 2.2 NM to RW35		1700		168°	
RW35		760*		348°	
1 NM 1.2 NM 2.9 NM 8 NM		GP 3.00° TCH 52		2000	
CATEGORY	A	B	C	D	
LPV DA	221-½		200 (200-½)		
LNAV/DA	303-½		282 (300-½)		
LNAV MDA	380-½		359 (400-½)		
CIRCLING	440-1		480-1		
	416 (500-1)		576 (600-½)		
	456 (500-1)		600-1½		
			656 (700-2)		
HIRL Rwy 17-35		Seaway Rwy 17W-35W			