

DME required.

▼


▲

For inop ALS, increase S-36 Cats A/B visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 2000 on OCF VORTAC R-355 to JODON/OCF VORTAC 16 DME and hold.

|                 |                                      |                                  |                  |
|-----------------|--------------------------------------|----------------------------------|------------------|
| ATIS<br>128.125 | JACKSONVILLE APP CON<br>118.6 251.15 | OCALA TOWER ★<br>119.25 (CTAF) 0 | GND CON<br>121.4 |
|-----------------|--------------------------------------|----------------------------------|------------------|

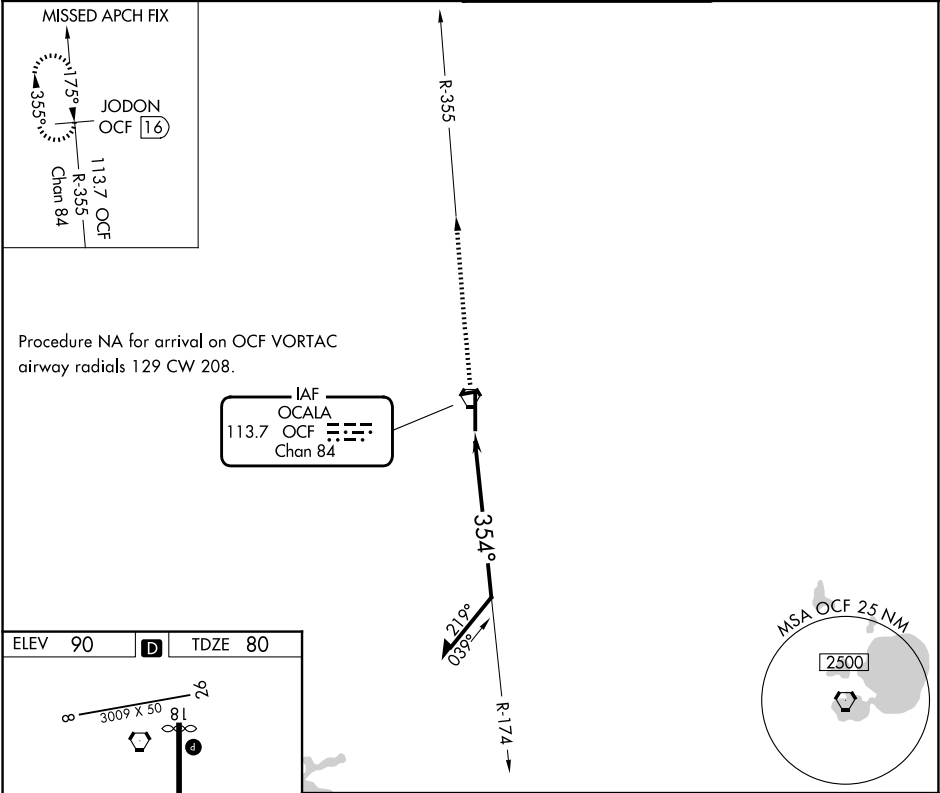

ELEV 90

D

TDZE 80

2000

JODON OCF 16

OCF R-355

OCF VORTAC

174°

1700

354°

OCF 2.7

1.6

Remain within 10 NM

| CATEGORY | A       | B             | C                            | D                            |
|----------|---------|---------------|------------------------------|------------------------------|
| S-36     | 640-3/4 | 560 (600-3/4) | 640-1 1/8                    | 560 (600-1 1/8)              |
| CIRCLING | 640-1   | 550 (600-1)   | 760-1 3/4<br>670 (700-1 3/4) | 920-2 3/4<br>830 (900-2 3/4) |

SE-3, 27 NOV 2025 to 25 DEC 2025

SE-3, 27 NOV 2025 to 25 DEC 2025