

WAAS CH 93702 W06A	APP CRS 057°	Rwy Ldg TDZE 2351 Apt Elev 2351
--	------------------------	---



RNAV (GPS) RWY 6

GENERAL WM J FOX AIRFIELD (WJF')

▼ When VGSI inop, Straight-in/Circling Rwy 6 procedure NA at night.
▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 45°C (113°F). When local altimeter setting not received, use Palmdale altimeter setting: increase LPV DA to 2661 feet, LNAV/VNAV DA to 2709 feet and all MDAs 60 feet, and increase Circling Cats C/D visibility ¼ SM. Baro-VNAV NA when using Palmdale altimeter setting.


MISSED APPROACH: Climb to 6000 direct SISOY and via 091° track to ETHER and hold.

ATIS 126.3	JOSHUA APP CON 126.1 290.3	FOX TOWER* 118.525 (CTAF) 256.9	GND CON 121.7 256.9	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------------	-------------------------

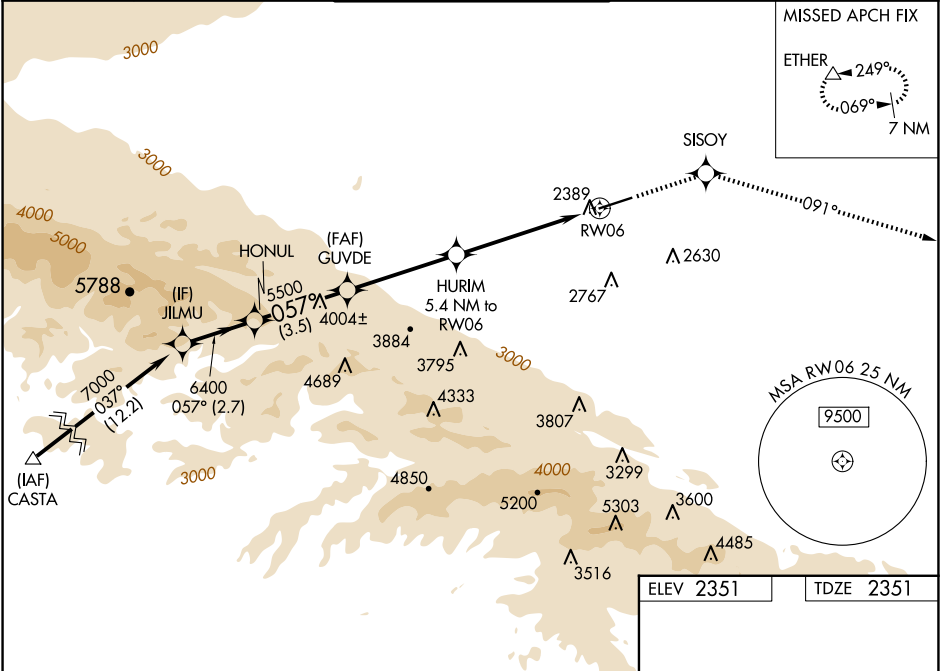

ELEV 2351	TDZE 2351
-----------	-----------

	JILMU	HONUL	GUVDE	HURIM	SISOY	tr 091°	ETHER
	7000	6400	5500	4100	6000		
	057°	057°					
Procedure Turn NA							
GP 3.00° TCH 40							
	2.7 NM	3.5 NM	4.1 NM	5.4 NM			
CATEGORY	A	B	C	D			
LPV DA	2601-1 250 (300-1)						
LNAV/VNAV DA	2649-1 298 (300-1)						
LNAV MDA	2940-1 589 (600-1)		2940-1½ 589 (600-1½)		2940-1¾ 589 (600-1¾)		
CIRCLING	2940-1 589 (600-1)		3120-2¼ 769 (800-2¼)		3120-2½ 769 (800-2½)		

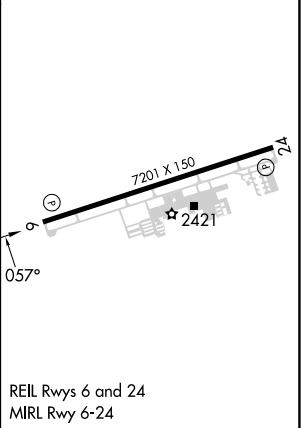

SW-3, 27 NOV 2025 to 25 DEC 2025

SW-3, 27 NOV 2025 to 25 DEC 2025