
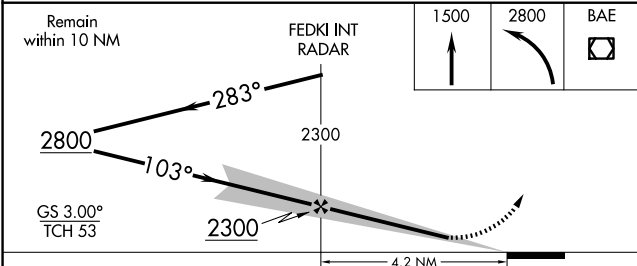


LOC I-SKC 109.5	APP CRS 103°	Rwy Ldg TDZE Apt Elev
		5849 901 912

ILS or LOC RWY 10

WAUKESHA COUNTY (U/S)

RADAR required for procedure entry.				MALSR 	MISSED APPROACH: Climb to 1500 then climbing left turn to 2800 direct BAE VOR/DME and hold, continue climb-in-hold to 2800.		
V A For inop ALS, increase S-LOC 10 visibility to 1½ SM. When local altimeter setting not received, use MWC altimeter setting and increase S-ILS 10 DA to 1149 feet; increase all MDAs 60 feet and S-LOC 10 visibility Cats C and D ½ SM, and Circling visibility Cats C and D ¼ SM.							
ATIS 118.875	MILWAUKEE APP CON 125.35 307.0	WAUKESHA TOWER ★ 123.7 (CTAF) 	GND CON 121.6	CLNC DEL 121.6	CLNC DEL 128.7 (When twr closed)	UNICOM 122.95	

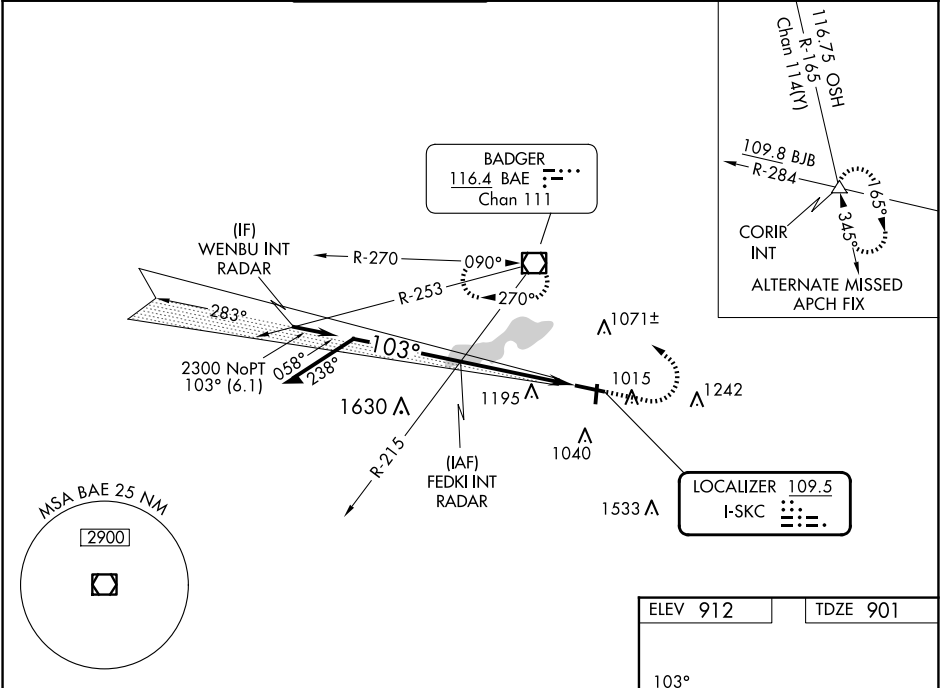

ELEV 912	TDZE 901
HIRL Rwy 10-28	
MIRL Rwy 18-36	
REIL Rwy 28	
REIL Rwy 18 and 36	
FAF to MAP 4.2 NM	
Knots	60 90 120 150 180
Min:Sec	4:12 2:48 2:06 1:41 1:24

EC-3, 27 NOV 2025 to 25 DEC 2025

EC-3, 27 NOV 2025 to 25 DEC 2025