

LOC/DME FONA <u>109.35</u> Chan 30(Y)	APP CRS 300°	Rwy Idg 5199 TDZE 656 Apt Elev 656
---	------------------------	---

ILS Z or LOC Z RWY 30
WINONA MUNI/MAX CONRAD FLD (ONA)

RNAV 1-GPS or radar required for procedure entry. DME required.
RNAV-1 GPS required from MAP to ALEYU.

 VDP NA with La Crosse alimeter setting. When local alimeter setting not received, use La Crosse alimeter setting and increase S-ILS 30 DA to 1064 and all visibilities.  NA  1/8 SM, increase all MDA 60 feet, and visibility S-LOC 30 Cat C/D 1/8 SM and Circling Cat B visibility 1/4 SM. For inop ALS, increase S-ILS 30 all Cats visibility to 1 1/8 SM, and S-LOC 30 Cats C/D visibility to 1 1/8 SM. For inop ALS when using La Crosse alimeter setting, increase S-ILS 30 all Cats visibility to 1 1/8 SM, and increase S-LOC 30 Cats C/D visibility to 1 1/8 SM.

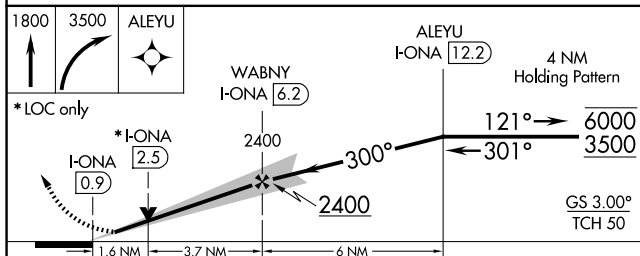
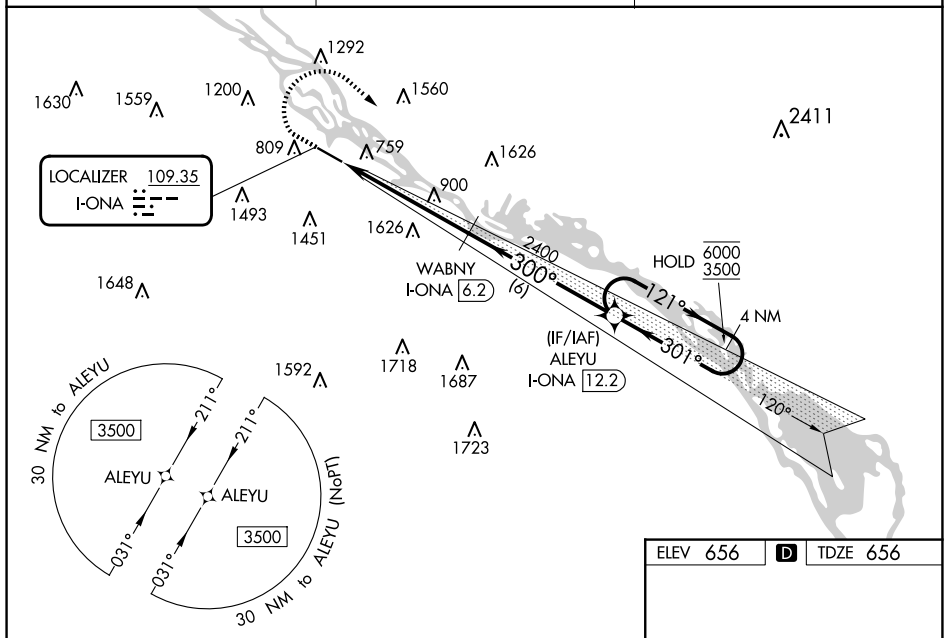
MALSR



MISSED APPROACH:
Climb to 1800 then
climbing right turn to
3500 direct ALEYU
and hold.

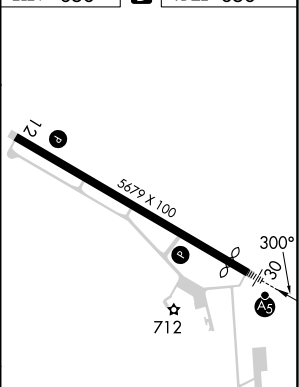
AWOS-3
118.075

MINNEAPOLIS CENTER
128.6 363.0

UNICOM
122.8 (CTAF) **L**

CATEGORY	A	B	C	D
S-ILS 30	1053- $\frac{3}{4}$ 397 (400- $\frac{3}{4}$)			
S-LOC 30	1220- $\frac{1}{2}$ 564 (600- $\frac{1}{2}$)	1220-1 $\frac{1}{4}$ 564 (600-1 $\frac{1}{4}$)		
C CIRCLING	1560-1 $\frac{1}{4}$ 904 (1000-1 $\frac{1}{4}$)	1600-1 $\frac{1}{4}$ 944 (1000-1 $\frac{1}{4}$)	1780-3 1124 (1200-3)	1980-3 1324 (1400-3)

ELEV 656	D	TDZE 656
----------	----------	----------



REIL Rwy 12 **L**
MIRL Rwy 12-30 **L**