

LOC I-AUM 110.55	APP CRS 351°	Rwy Idg TDZE Apt Elev 5800 1231 1234
----------------------------	------------------------	--



ILS or LOC RWY 35
AUSTIN MUNI (AUM)

⚠ NA When local altimeter setting not received, use Albert Lea altimeter setting and increase all DA 48 feet and all MDA 60 feet; increase Circling Cat C/D visibility ¼ SM. For inoperative MALSR, increase S-LOC 35 Cats C and D visibility to 1½ mile.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 3800 on heading 179° and MCW VOR/DME R-034 to FARUN INT and hold.

AWOS-3 119.025	ROCHESTER APP CON* 119.8 251.125	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

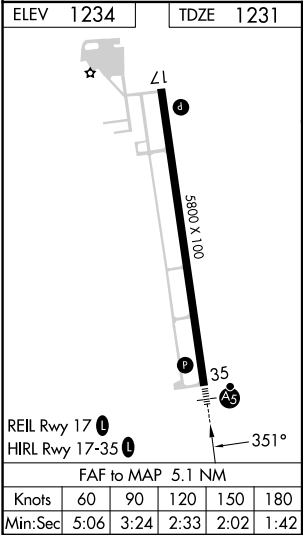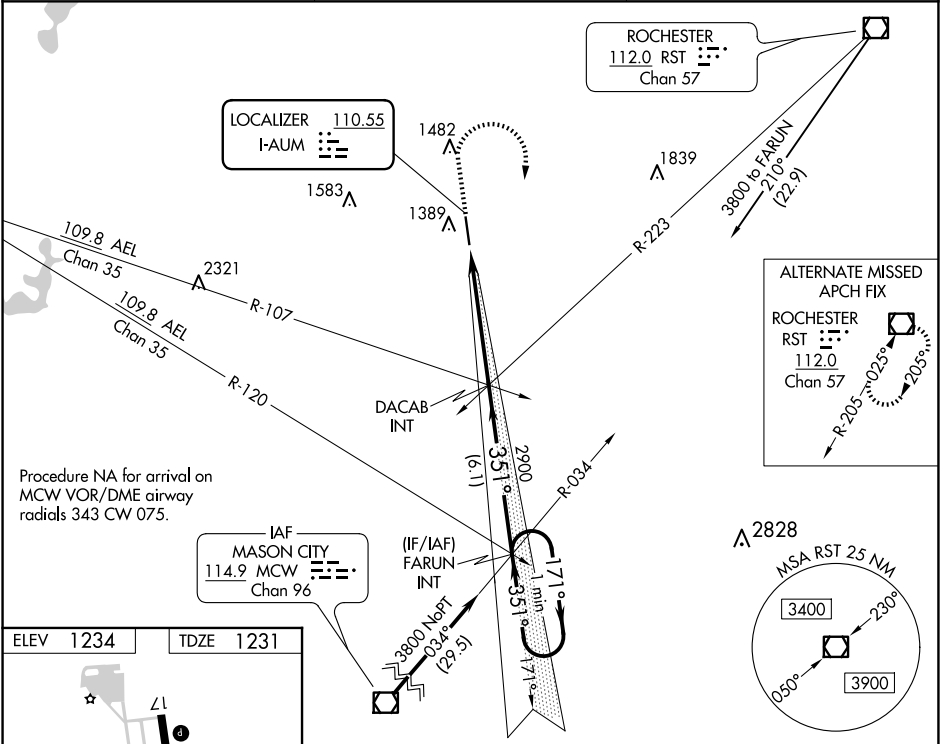

1800	3800	MCW R-034	FARUN INT	VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 42).		One Minute Holding Pattern	
		DACAB INT	FARUN INT	171°	3800	GS 3.00° TCH 47	
		2900	2900	351°			
		5.1 NM					
		5.1 NM					
CATEGORY	A		B		C		D
S-ILS 35	1431-1½		200 (200-½)				
S-LOC 35	1700-½	469 (500-½)	1700-1		469 (500-1)		
CIRCLING	1740-1	506 (600-1)	1800-1½		1880-2		
			566 (600-½)		646 (700-2)		

NC-1, 27 NOV 2025 to 25 DEC 2025

NC-1, 27 NOV 2025 to 25 DEC 2025