

LOC/DME I-TBN
110.9
Chan **46**

APP CRS
147°

Rwy Ldg
TDZE **1158**
Apt Elev **1160**

ILS or LOC RWY 15

WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)

▼


▲

Circling NA west of Rwy 15-33. For inop ALS increase S-LOC 15 Cats C/D visibility to 1½ SM. When local altimeter setting not received, use Rolla Nil altimeter setting and increase DA to 1427 feet; and all MDAs 80 feet, increase S-LOC 15 Cat C/D and Circling Cat C visibility ¼ SM and WOKVI fix minimums S-LOC 15 Cat C/D and Circling Cat C visibility ¼ SM. VDP NA when using Rolla Nil altimeter setting. For inop ALS when using Rolla Nil altimeter setting increase S-LOC 15 WOKVI fix minimums Cats C/D visibility to 1¼ SM. Inop table does not apply to S-ILS 15, S-LOC 15 Cat A/B, and WOKVI fix minimums S-LOC 15.

MALSR

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 on heading 298° and TBN VOR R-327 to PIMEW INT/I-TBN 13 DME and hold.

D-ATIS 118.7 229.4	KANSAS CITY CENTER 128.35 284.675	FORNEY TOWER★ 125.4 (CTAF) 0 268.7	GND CON 123.75 256.8
------------------------------	---	--	--------------------------------

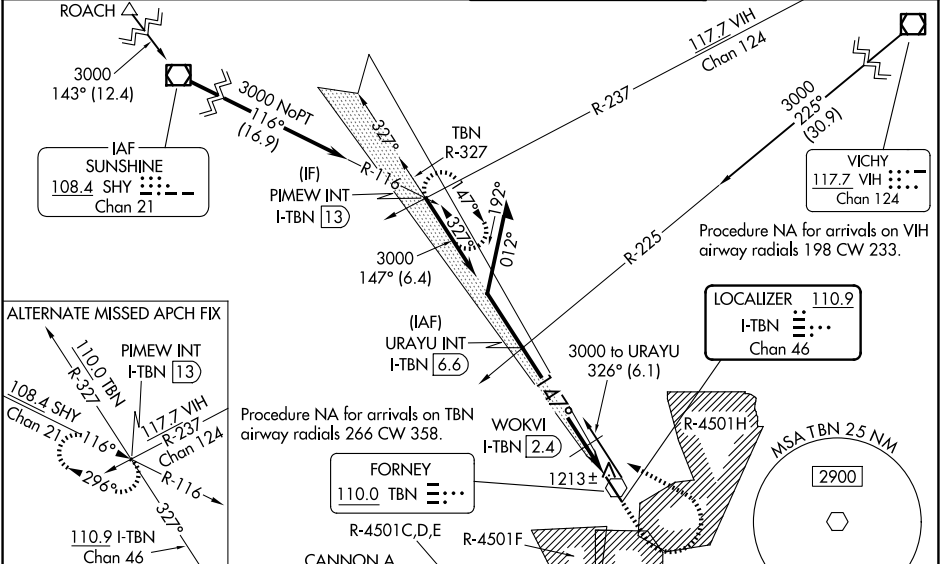

ELEV 1160 TDZE 1158

REIL Rwy 15 and 33
HIRL Rwy 15-33

TWR

#1740 when using Rolla Nil altimeter setting.
Remain within 10 NM

URAYU INT I-TBN 6.6

3000 147° 3000

GS 3.00° TCH 47

WOKVI I-TBN 2.4 *I-TBN 1.9 I-TBN 1

*LOC only.

#1660

4.2 NM 0.5 NM 0.9 NM

CATEGORY	A	B	C	D
S-ILS 15		1358-1	200 (200-1)	
S-LOC 15		1660-1	502 (500-1)	
CIRCLING	1660-1	500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)
WOKVI FIX MINIMUMS				
S-LOC 15		1500-1	342 (400-1)	
CIRCLING	1580-1 420 (500-1)	1660-1 500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52