

WAAS CH 99709 W28A	APP CRS 278°	Rwy Ldg TDZE Apt Elev	3901 904 906
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 28R
FLYING CLOUD (FCM)

RNP APCH.

Baro-VNAV NA when using Minneapolis-St Paul Intl/Wold Chamberlain altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Minneapolis-St Paul Intl/Wold Chamberlain altimeter setting and increase all DA 34 feet and all MDA 40 feet; increase Circling Cat D visibility ¼ mile. When Circling to Rwy 18, 36 at night, operational VGSi required, remain on or above VGSi glidepath until threshold.

MISSED APPROACH: Climb to 2800 direct SIGCO and hold.

ATIS 124.9	MINNEAPOLIS APP CON 134.7 284.7	FLYING CLOUD TOWER ★ 119.15 (CTAF) 0	GND CON 121.7	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

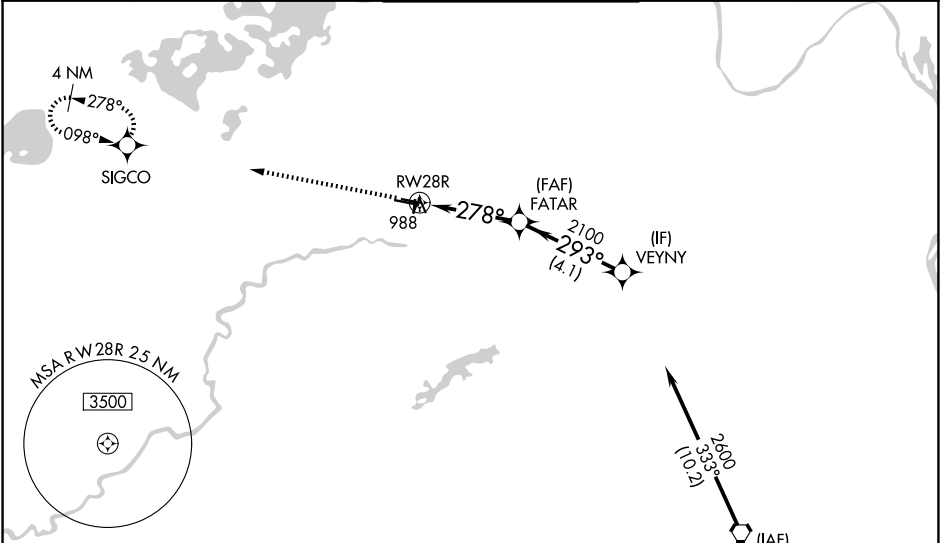

ELEV 906	TDZE 904
----------	----------

Procedure NA for arrivals on FGT VORTAC
airway radials 258 CW 011.

2800 SIGCO

VGSi and RNAV glidepath not coincident
(VGSi Angle 3.00/TCH 38).

VEYNY

FATAR

2100

293°

2600

GP 3.00°
TCH 45

3.6 NM

4.1 NM

CATEGORY	A	B	C	D
LPV DA	1 154-1 250 (300-1)			
LNAV/VNAV DA	1 154-1 250 (300-1)			
LNAV MDA	1 240-1 336 (400-1)			
CIRCLING	1320-1 414 (500-1)	1440-1 534 (600-1)	1440-1½ 534 (600-1½)	1540-2 634 (700-2)

HIRL Rwy 10R-28L 0

REIL Rwys 10L and 28R

REIL Rwys 18, 28L, and 36 0

MIRL Rwy 10L-28R

MIRL Rwy 18-36 0

NC-1, 27 NOV 2025 to 25 DEC 2025

NC-1, 27 NOV 2025 to 25 DEC 2025