




WAAS CH 86709 W19D	APP CRS 191°	Rwy Ldg TDZE 278 Apt Elev 312
--	------------------------	---

RNAV (GPS) Y RWY 19R
WASHINGTON DULLES INTL (IAD)

RNP APCH - GPS.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.	ALSF-2 	MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct AMOSS and hold.
-----------------	---	------------	---

D-ATIS 134.85	POTOMAC APP CON 120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (331°-090°)	DULLES TOWER 120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwy 1L/19R and 12/30)	GND CON 121.9 317.8 (EAST) 121.625 348.6 (WEST)
-------------------------	---	--	---

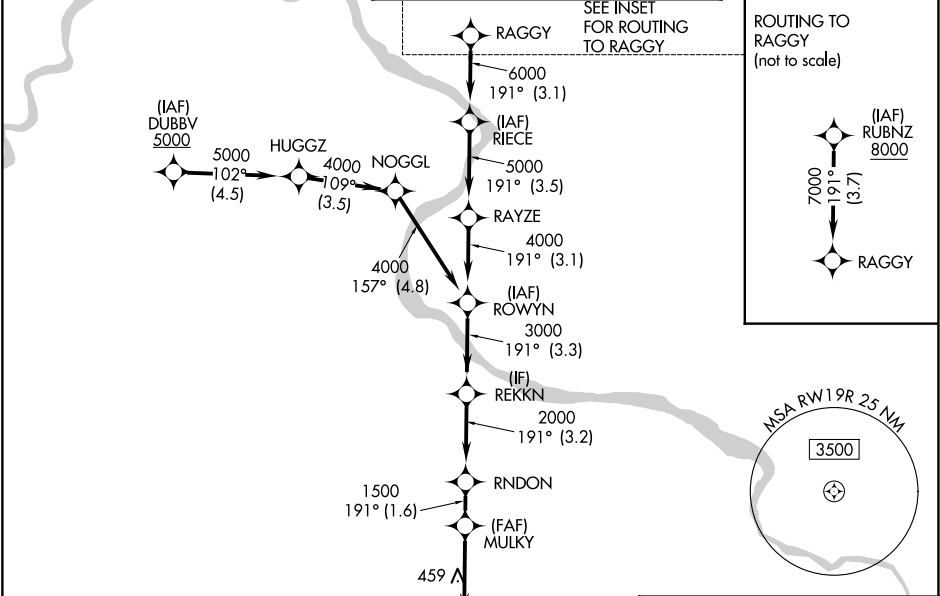

CATEGORY	A	B	C	D
LPV DA		478/18	200 (200-½)	
LNAV/VNAV DA		708/40	430 (400-¾)	
LNAV MDA	720/24	442 (500-½)	720/45	442 (500-¾)
CIRCLING	940-1	628 (700-1)	940-1¾ 628 (700-1¾)	1180-2¾ 868 (900-2¾)

