


LOC I-ARR 108.9	APP CRS 090°	Rwy Ldg TDZE Apt Elev 6501 707 712
---------------------------	------------------------	--

ILS or LOC RWY 9

AURORA MUNI (ARR)

RADAR required for procedure entry.		MALSRR	MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 090° and on DPA VOR/DME R-185 to VAINS INT/DPA 7.9 DME and hold, continue climb-in-hold to 3000.
For inop ALS, increase S-LOC 9 Cat C/D visibilities to 1½ SM.			
ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER★ 120.6 (CTAF)	GND CON 121.7

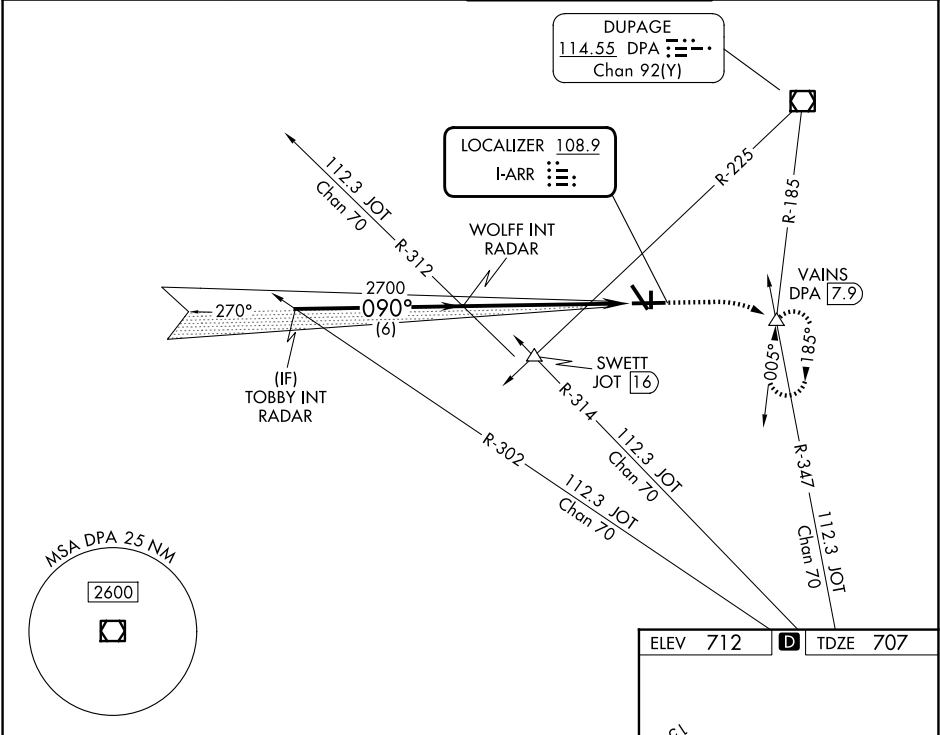

TOBBY INT RADAR		WOLFF INT RADAR		1200 ↑	3000 hdg 090°	DPA R-185	VAINS △
2700		2700					
GS 3.00° TCH 45		2700					
6 NM		6.1 NM					
CATEGORY	A	B	C	D			
S-ILS 9	907-½ 200 (200-½)						
S-LOC 9	1220-½ 513 (600-½)			1220-1 513 (600-1)			
CIRCLING	1220-1 508 (600-1)			1300-½ 588 (600-½)		1320-2 608 (700-2)	

