


|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>45522</b><br><b>W09A</b> | APP CRS<br><b>090°</b> | Rwy Ldg<br>TDZE <b>707</b><br>Apt Elev <b>712</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 9

AURORA MUNI (ARR)

|                                                                                                                                         |                                       |                                         |                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------|----------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                         |                                       | MALSR                                   | MISSED APPROACH:<br>Climb to 2500 direct HOGIE and hold. |
| ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. |                                       |                                         |                                                          |
| ATIS<br><b>125.85</b>                                                                                                                   | CHICAGO APP CON<br><b>133.5 349.0</b> | AURORA TOWER ★<br><b>120.6 (CTAF) 0</b> | GND CON<br><b>121.7</b>                                  |

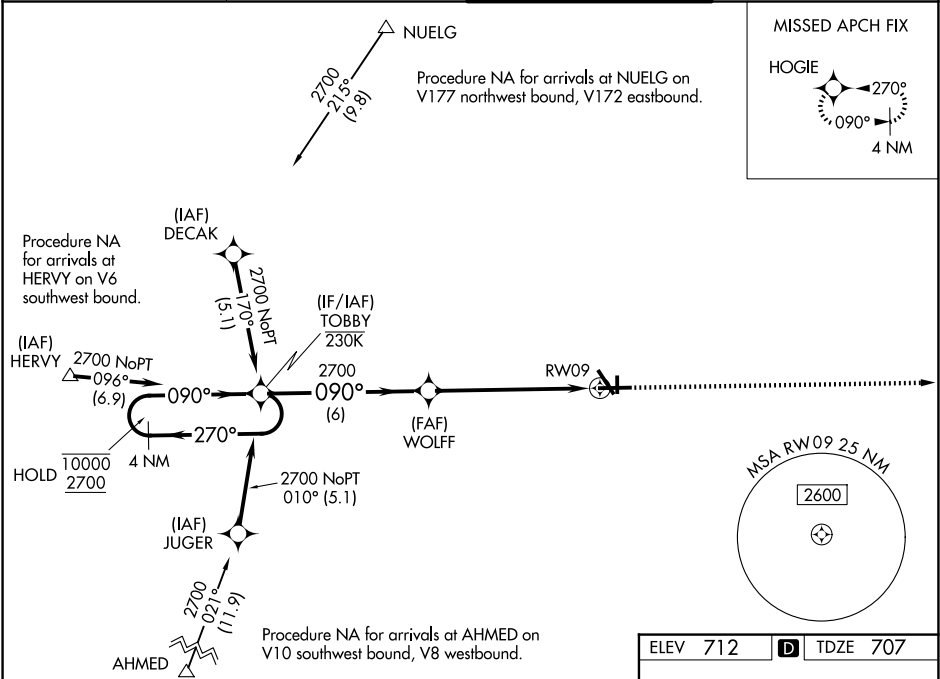

|                      |        |                    |                         |                       |             |
|----------------------|--------|--------------------|-------------------------|-----------------------|-------------|
| 4 NM Holding Pattern |        | TOBBY              | WOLFF                   | 2500                  | HOGIE       |
| 10000<br>2700        |        | GP 3.00°<br>TCH 45 | 2700                    | *1.5 NM to RWY 09     | *LNAV only. |
| 6 NM                 |        | 4.6 NM             | 1.5 NM                  |                       |             |
| CATEGORY             | A      | B                  | C                       | D                     |             |
| LPV DA               | 957-½  |                    | 250 (300-½)             |                       |             |
| LNAV/VNAV DA         | 1035-½ |                    | 328 (400-½)             |                       |             |
| LNAV MDA             | 1220-½ | 513 (600-½)        | 1220-1                  | 513 (600-1)           |             |
| CIRCLING             | 1220-1 | 508 (600-1)        | 1300-1½<br>588 (600-1½) | 1320-2<br>608 (700-2) |             |

ELEV 712

TDZE 707

81  
3198 X 7/5  
5503 X 100  
6501  
33  
36  
TWR  
090°

MIRL Rwy 18-36 0  
HIRL Rwy 15-33 and 9-27 0  
REIL Rwy 15, 18, 27, and 36 0