

WAAS CH 65817 W33A	APP CRS 334°	Rwy Ldg 10702 TDZE 17 Apt Elev 17
--	------------------------	--


RNAV (GPS) RWY 33
CHENNAULT INTL (CWF)

RNP APCH - GPS.


ASR Baro-VNAV and VDP NA when using Lake Charles Rgnl altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase LPV DA to 233 feet; increase LNAV/VNAV DA to 510 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 20 feet and LNAV visibility Cat C/D $\frac{1}{8}$ SM.

MISSED APPROACH: Climb to 2000 direct CEVKU and hold.

ATIS 120.0	LAKE CHARLES APP CON ★ 119.8 282.3	CHENNAULT TOWER ★ 124.2 (CTAF) 0 290.4	GND CON 121.65 275.8	UNICOM 122.95
---------------	---------------------------------------	---	-------------------------	------------------

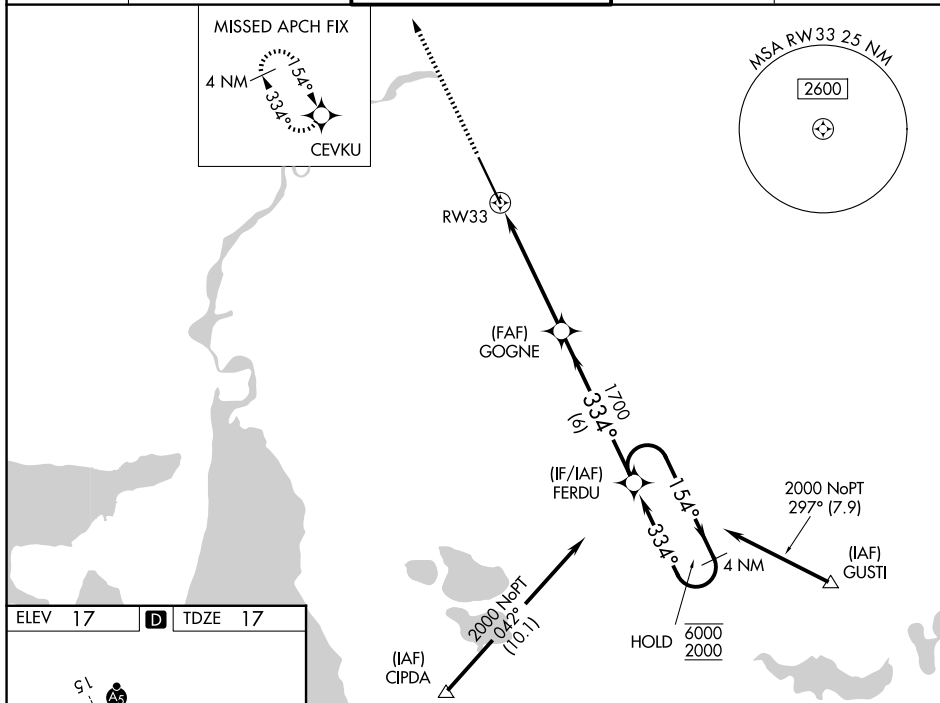

ELEV 17	D	TDZE 17
---------	----------	---------

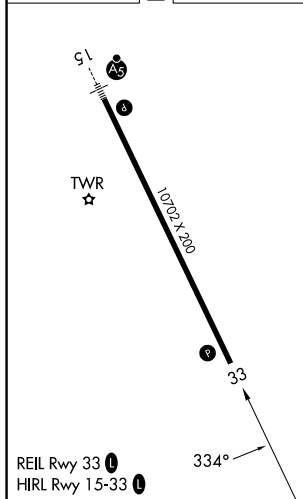[illegible]