

LOC H-LBE
110.9

APP CRS
236°

Rwy Idg
TDZE
1145
Apt Elev
1199

ILS or LOC RWY 24
ARNOLD PALMER RGNL (LBE)


RNAV 1-GPS or RADAR required for procedure entry.
From IGOCI: RNAV 1-GPS required.
RADAR required.

MALSR
AS

MISSED APPROACH: Climb to 2000
then climbing right turn to 5000
direct AGC VOR/DME and hold.

⚠ Circling NA SE of Rwy 6-24. Inop table does not apply to S-LOC 24 Cats C/D.
For inop ALS, increase POSER OM minimums S-LOC 24 Cats C/D visibility to 1 3/4 SM.

ATIS 118.375	JOHNSTOWN APP CON ★ 121.2 299.2	PALMER TOWER ★ 125.0 (CTAF) 0	GND CON 121.8
------------------------	---	---	-------------------------

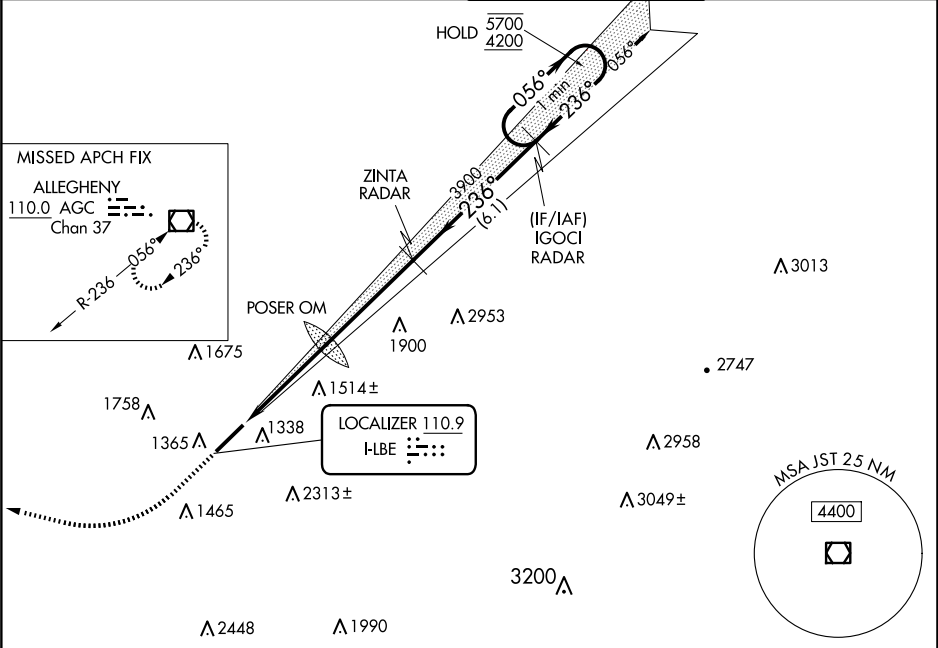

2000 5000 AGC

*LOC only.

One Minute Holding Pattern

POSER OM

ZINTA RADAR

IGOCI RADAR

3900

236°

056°

5700

4200

GS 3.00°

TCH 55

*2380

4.2 NM

4.3 NM

6.1 NM

CATEGORY	A	B	C	D
S-ILS 24	1345-1/2 200 (200-1/2)			
S-LOC 24	2380-3/4 1235 (1200-3/4)	2380-1 1235 (1200-1)	2380-3 1235 (1200-3)	
CIRCLING	2380-1 1/4 1181 (1200-1 1/4)	2380-1 1/2 1181 (1200-1 1/2)	2380-3 1181 (1200-3)	
POSER OM MINIMUMS				
S-LOC 24	1760-1/2 615 (600-1/2)	1760-13/8 615 (600-13/8)		
CIRCLING	1760-1 561 (600-1)	1780-1 581 (600-1)	2060-2 1/2 861 (900-2 1/2)	2060-2 3/4 861 (900-2 3/4)

ELEV 1199 D TDZE 1145

236°

AS

14% DOWN

8222 X 150

TWR 1223

REIL Rwy 6

HIRL Rwy 6-24

FAF to MAP 8.5 NM

Knots	60	90	120	150	180
Min:Sec	8:30	5:40	4:15	3:24	2:50