

LOC I-ECC <u>110.1</u>	APP CRS 200°	Rwy Ldg TDZE Apt Elev	8653 5605 5622
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 20
CEDAR CITY RGNL (CDC)

DME required.

T **A** **NA** XOJPO fix minimums (Dual VOR receivers required): For inop ALS, increase S-LOC 20 Cats C/D visibility to 1 $\frac{3}{8}$ SM. For inop ALS, increase S-LOC 20 Cats C/D visibility to 2 $\frac{1}{2}$ SM.
#For inop ALS, increase S-LLS 20 visibility all Cats to 1 SM

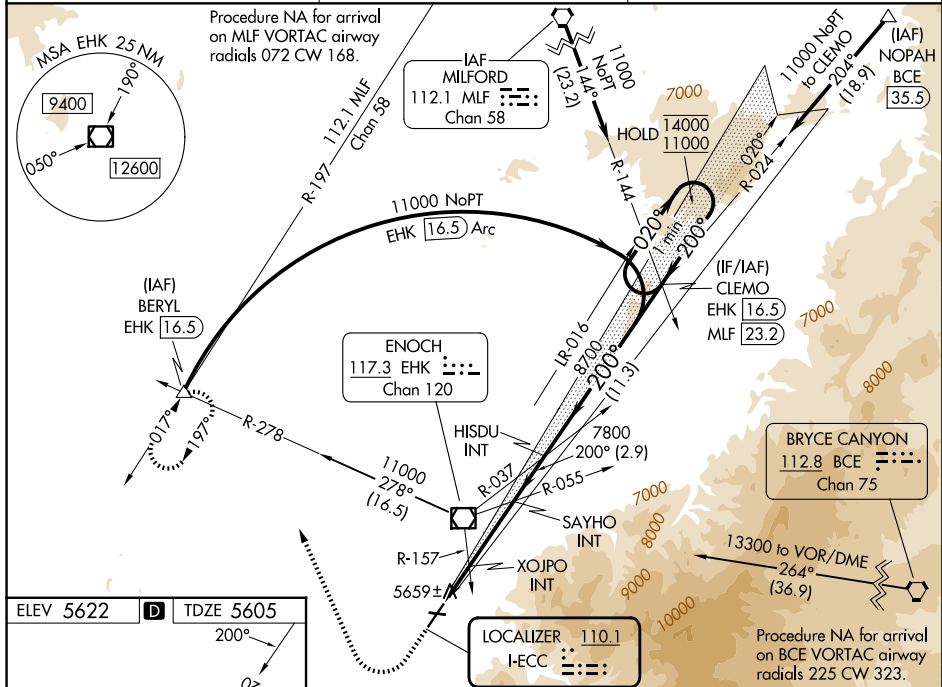
MALSR



MISSED APPROACH: Climb to 6200 then climbing right turn to 10000 on heading 322° and on EHK R-278 to BERYL INT/EHK 16.5 DME and hold, continue climb-in-hold to 10000.

† Missed approach requires minimum climb of 210 feet per NM to 7300.

ASOS 119.025	SALT LAKE CITY CENTER 125.575 379.275	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

[illegible]