

WAAS CH 70412 W36A	APP CRS 357°	Rwy ldg 6103 TDZE 995 Apt Elev 1016
--	------------------------	--

RNAV (GPS) RWY 36



ADA RGNL (ADH)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Seminole altimeter setting.

⚠ Circling Rwy 31 NA at night. Rwy 36 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Seminole altimeter setting: increase LPV DA to 1311 feet, LNAV/VNAV DA to 1600 feet and all MDA 80 feet. Increase LPV all Cats and LNAV Cats C and D visibility ¼ SM, increase LNAV/VNAV all Cats visibility to 2 ½ SM. Increase Circling Cats C/D visibility ½ SM.

MISSED APPROACH: Climb to 3000
direct FEKVO and hold.

AWOS-3PT 118.725	FORT WORTH CENTER 132.2 338.35	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

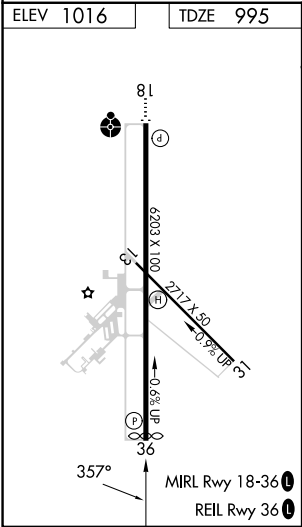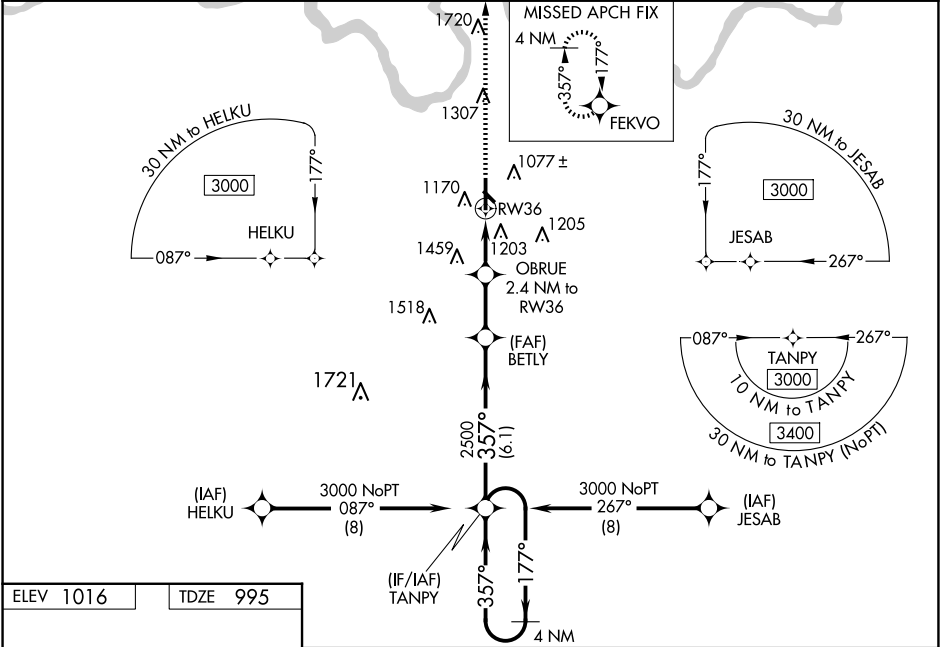

3000	FEKVO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).			
*LNAV only.		BETLY	TANPY	4 NM Holding Pattern	
		OBRUE 2.4 NM to RW36		177° → 3000	
		1.4 NM to RW36		← 357°	
		RW36			
		*1780	2500		GP 3.00° TCH 35
		1.4 NM	1.0	2.3 NM	6.1 NM
CATEGORY	A	B	C	D	
LPV DA	1245-7/8		250 (300-7/8)		
LNAV/VNAV DA	1534-17/8		539 (600-17/8)		
LNAV MDA	1460-1	465 (500-1)	1460-13/8	465 (500-13/8)	
CIRCLING	1520-1 504 (600-1)	1640-1 624 (700-1)	1820-2 1/4 804 (900-2 1/4)	1820-2 1/2 804 (900-2 1/2)	