

WAAS CH 69222 W13A	APP CRS 130°	Rwy Ldg TDZE 1354 Apt Elev 1354
--	------------------------	---

RNAV (GPS) RWY 13

RANGE RGNL (HIB)


RNP APCH - GPS.

Baro-VNAV and VDP NA when using Eveleth altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Eveleth altimeter setting and increase LPV DA to 1640 feet; increase LNAV/VNAV DA to 1766 feet and all visibilities ½ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 SM. For inop ALS when using Eveleth altimeter setting, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats to 1½ SM, LNAV Cat C/D to 1½ SM.

MALSRL

MISSED APPROACH:
Climb to 3500 direct CEKSA and hold.

ASOS 126.425	DULUTH APP CON 125.45 233.7	UNICOM 123.0 (CTAF) 1
------------------------	---------------------------------------	---------------------------------

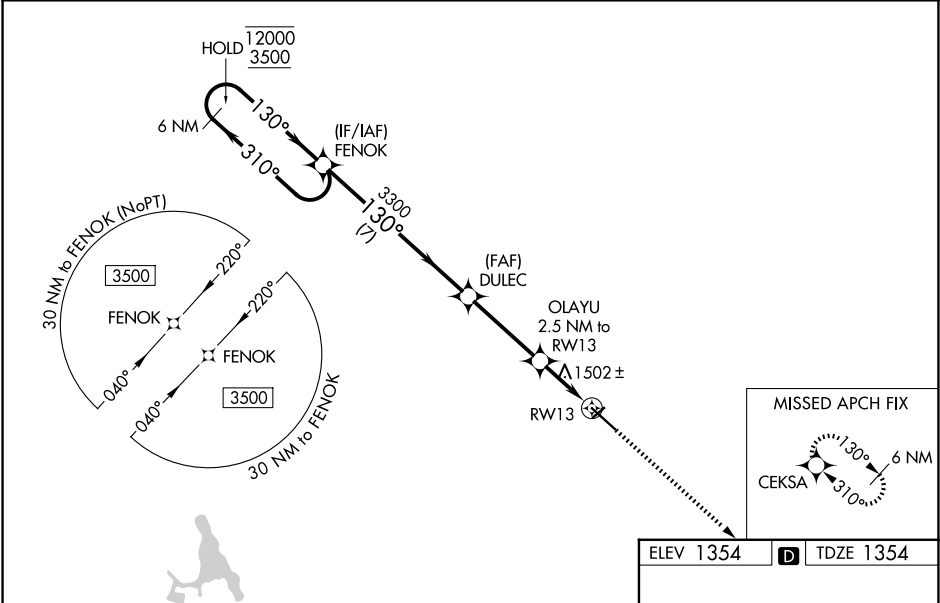

6 NM Holding Pattern		FENOK	DULEC	OLAYU 2.5 NM to RW13	CEKSA
12000 3500		310° 130°	130°	130°	130°
GP 3.00° TCH 48		7 NM	3.5 NM	1.3 NM	1.2 NM
CATEGORY	A	B	C	D	
LPV DA	1604-½ 250 (300-½)				
LNAV/VNAV DA	1730-⅝ 376 (400-⅝)				
LNAV MDA	1800-½ 446 (500-½)		1800-⅞ 446 (500-⅞)		
CIRCLING	1900-1 546 (600-1)		1920-1½ 566 (600-1½)		1980-2 626 (700-2)
HIRL Rwy 13-31 1					

NC-1, 27 NOV 2025 to 25 DEC 2025

NC-1, 27 NOV 2025 to 25 DEC 2025