


WAAS CH 90417 W11A	APP CRS 114°	Rwy Ldg TDZE 539 Apt Elev 544
--	------------------------	---

RNAV (GPS) RWY 11

ST LOUIS RGNL (ALN)

RNP APCH.		MISSED APPROACH: Climb to 2100 direct QUNIE and hold.		
▼ ▲ Rwy 11 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.				
ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER* 126.0 (CTAF) 0 239.0	GND CON 120.2	UNICOM 122.95

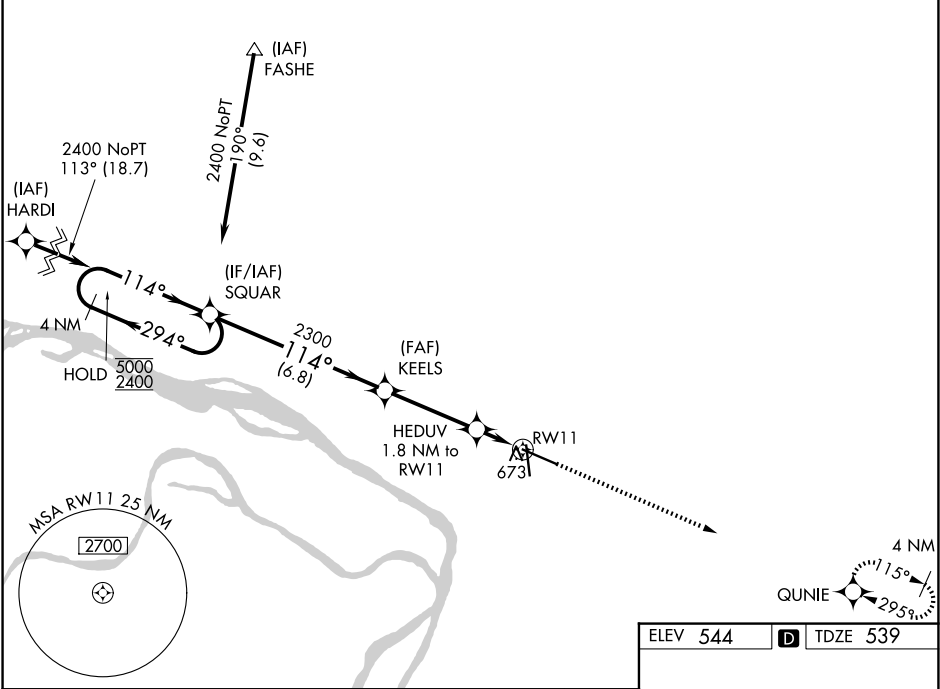

4 NM Holding Pattern		SQUAR		KEELS 2300		HEDUV 1.8 NM to RW11		2100 ↑ QUNIE ✱ *LNAV only.	
5000 ← 294° 2400 → 114°		114°		2300		*1140		*1.3 NM to RW11 RW11	
GP 3.00° TCH 46		6.8 NM		3.6 NM		0.5 NM		1.3	
CATEGORY	A	B	C	D					
LPV DA	794-7⁄8		255 (300-7⁄8)						
LNAV/ VNAV DA	881-1 1⁄8		342 (400-1 1⁄8)						
LNAV MDA	980-1 441 (500-1)		980-1 3⁄8 441 (500-1 3⁄8)						
CIRCLING	1000-1 456 (500-1)		1160-1 3⁄4 616 (700-1 3⁄4)				1200-2 656 (700-2)		

