

|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>77911</b><br><b>W23A</b> | APP CRS<br><b>235°</b> | Rwy Idg<br>TDZE <b>418</b><br>Apt Elev <b>439</b> | <b>6051</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|

RNAV (GPS) RWY 23



MADISONVILLE RGNL (2I0)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Evansville altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Evansville altimeter setting and increase LPV DA to 773 feet and all visibilities ¼ SM, LNAV/VNAV DA to 829 feet and all visibilities ⅓ SM, increase all MDA 100 feet and LNAV Cats C/D visibility ⅓ SM. For inop ALS, increase LPV and LNAV/VNAV all Cats and LNAV Cat C/D visibility ⅓ SM. For inop ALS when using Evansville altimeter setting, increase LPV and LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅓ SM.

ODALS

MISSED APPROACH:  
Climb to 2600 direct  
CELES and hold.

|                          |                                              |                          |                                 |
|--------------------------|----------------------------------------------|--------------------------|---------------------------------|
| AWOS-3<br><b>126.475</b> | EVANSVILLE APP CON ★<br><b>124.025 290.9</b> | CLNC DEL<br><b>120.1</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|--------------------------|----------------------------------------------|--------------------------|---------------------------------|

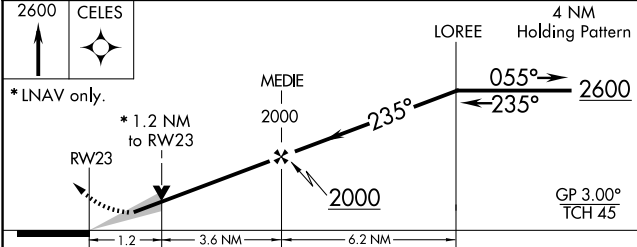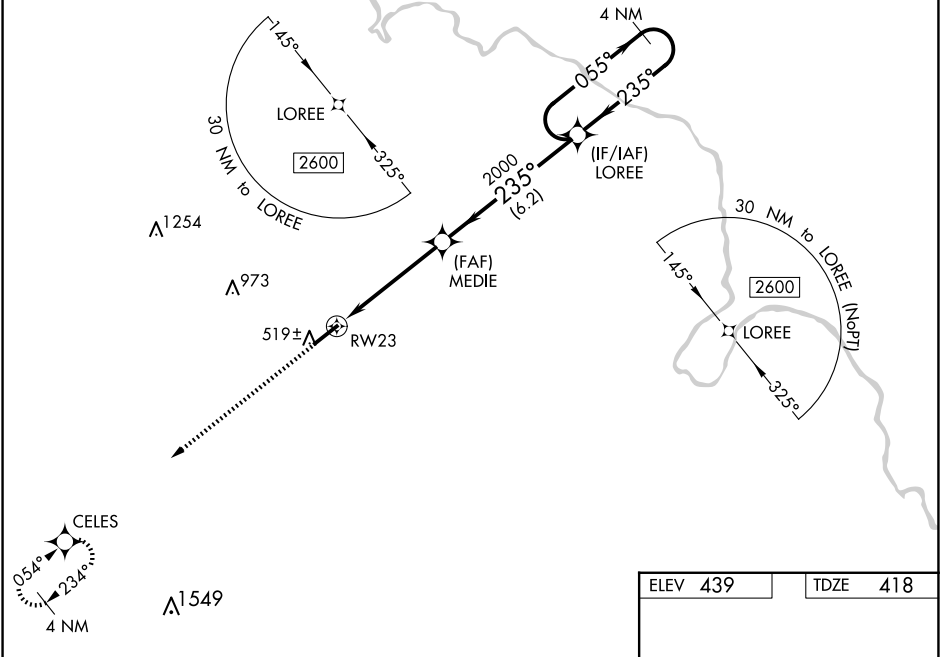

| CATEGORY     | A                    | B                    | C                      | D                      |
|--------------|----------------------|----------------------|------------------------|------------------------|
| LPV DA       |                      | 674-¾                | 256 (300-¾)            |                        |
| LNAV/VNAV DA |                      | 730-⅞                | 312 (300-⅞)            |                        |
| LNAV MDA     | 840-¾                | 422 (500-¾)          | 840-1⅛                 | 422 (500-1⅛)           |
| CIRCLING     | 860-1<br>421 (500-1) | 900-1<br>461 (500-1) | 920-1½<br>481 (500-1½) | 1340-3<br>901 (1000-3) |

