


WAAS CH 58141 W23A	APP CRS 230°	Rwy Idg 5501 TDZE 182 Apt Elev 182
--	------------------------	---

RNAV (GPS) RWY 23

SUMTER (SMS)

RNP APCH. Circling NA to Rwy 14 and 32. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS increase LNAV/VNAV Cat A/B visibility to 7/5 SM.		ODALS 	MISSED APPROACH: Climb to 600 then climbing left turn to 2400 direct GAUGH and hold.
--	--	--	--

AWOS-3 118.075	SHAW APP CON★ 125.4	UNICOM 122.7 (CTAF) 0
--------------------------	-------------------------------	--

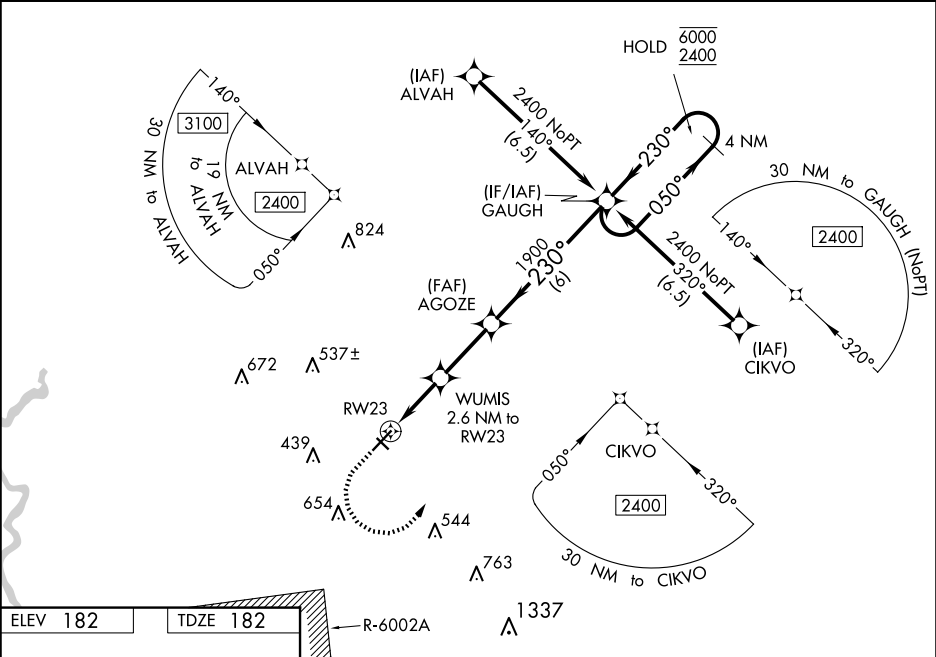

ELEV 182 TDZE 182		R-6002A	
230°		600 2400 GAUGH	
*LNAV only.		WUMIS 2.6 NM to RW23	
*1 NM to RW23		AGOZE 1900	
RW23		1040*	
1 NM 1.6 NM 2.7 NM 6 NM		GAUGH 4 NM Holding Pattern	
CATEGORY		A	B C D
LPV DA		382-3/4 200 (200-3/4)	
LNAV/VNAV DA		460-3/4 278 (300-3/4)	
LNAV MDA		540-3/4 358 (400-3/4)	540-7/8 358 (400-7/8)
CIRCLING		600-1 418 (500-1)	680-1 498 (500-1) 1000-2 1/2 818 (900-2 1/2) 1000-2 3/4 818 (900-2 3/4)