


RADAR required.

NOTE: Chart not to scale.

Rwys 16, 34: Standard with minimum climb of 500'/NM to 580.

NOTE: CRGER-TRANSITION ATC assigned only for aircraft departing 54T, AXH, EFD, GLS, HPY, IWS, LBX, LVJ, SGR, TME, TØØ, T41.

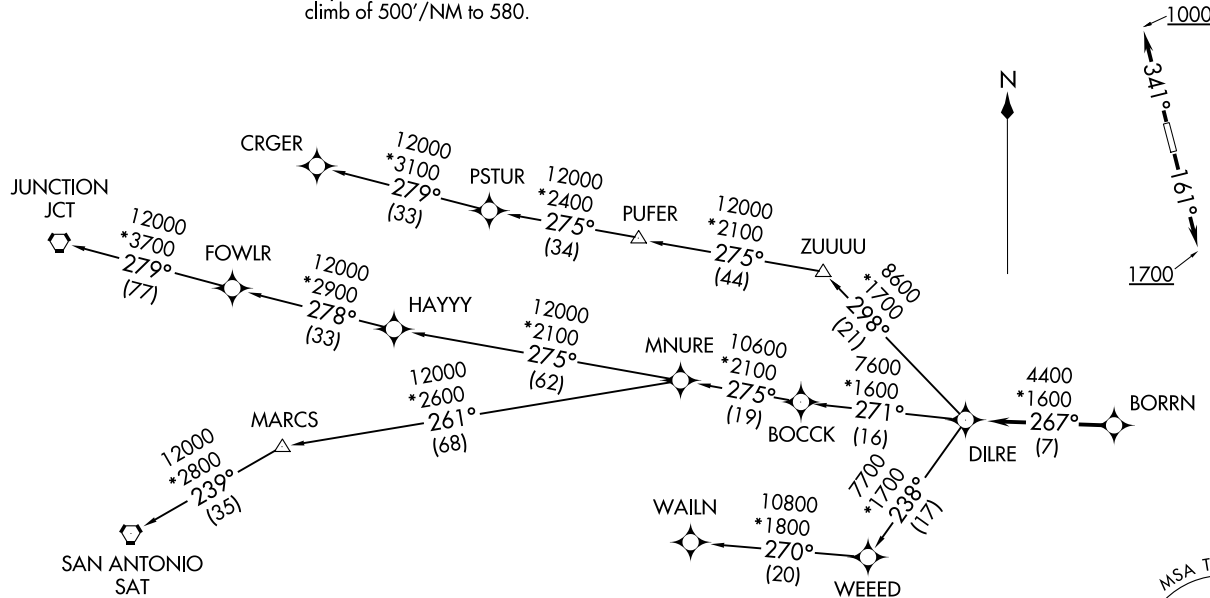

A circular digital display for the MSA T78 25 NM level. The text "MSA T78 25 NM" is curved along the top inner edge. In the center, a rectangular box displays the number "3100". Below the box is a small circular icon with a crosshair.

(CONTINUED ON FOLLOWING PAGE)

LIBERTY, TEXAS
LIBERTY MUNI (T78)LIBERTY MUNI (T78)
LIBERTY, TEXAS



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 16: Climb on heading 161° to 1700, for RADAR vectors to BORRN, thence. . . .
TAKEOFF RUNWAY 34: Climb on heading 341° to 1000, for RADAR vectors to BORRN, thence. . . .

. . . .on track 267° to DILRE, then on (transition). Maintain ATC assigned altitude.
Expect filed altitude 10 minutes after departure.

- CRGER TRANSITION (BORRN6.CRGER)
- JUNCTION TRANSITION (BORRN6.JCT)
- MNURE TRANSITION (BORRN6.MNURE)
- SAN ANTONIO TRANSITION (BORRN6.SAT)
- WAILN TRANSITION (BORRN6.WAILN)

SC-5, 27 NOV 2025 to 25 DEC 2025

SC-5, 27 NOV 2025 to 25 DEC 2025