


WAAS CH 50231 W05A	APP CRS 047°	Rwy Idg TDZE 429 Apt Elev 441
--	------------------------	---

RNAV (GPS) RWY 5

NORTH CENTRAL STATE (SF'Z)

RNP APCH - GPS.	MALS 	MISSED APPROACH: Climb to 2000 then climbing left turn to 2500 direct FOSTY and hold.
 Circling Rwy 15, 33 NA at night. For inoperative MALS, increase LPV all Cats visibility to ¾ mile. For inop ALS, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1 ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.		

AWOS-3PT 120.775	PROVIDENCE APP CON ★ 123.675 244.875	CLNC DEL 124.35	UNICOM 123.075 (CTAF) 
----------------------------	--	---------------------------	---

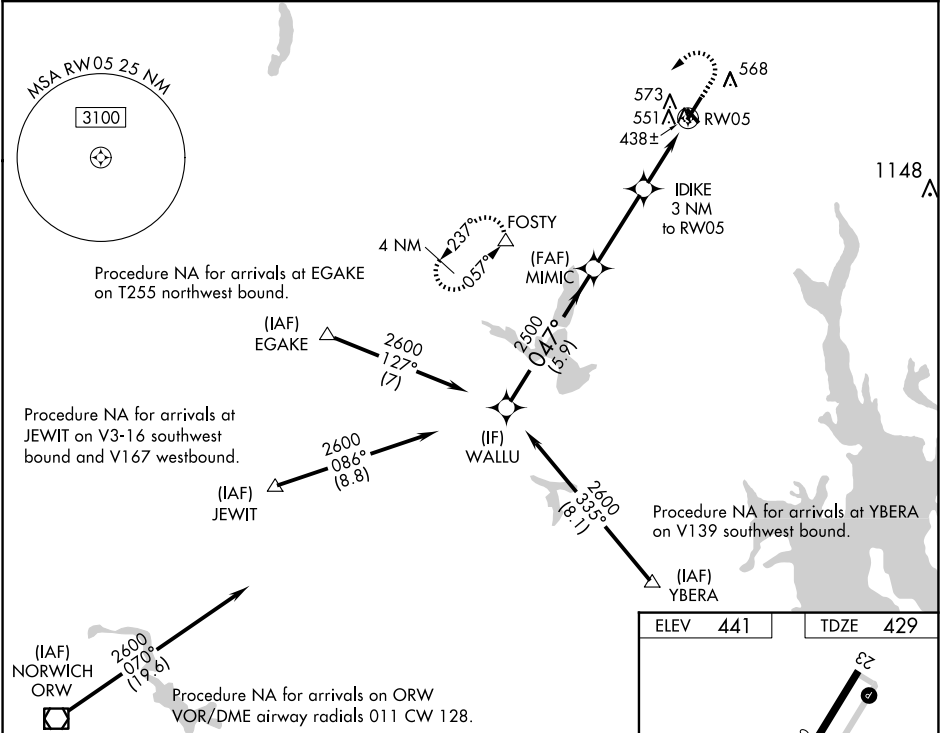

WALLU

2600

GP 3.00°
TCH 52

MIMIC

2500

2500

*1420

IDIKE

3 NM
to RW05

1.1 NM to
RW05

RW05

2000

2500

FOSTY

△

047°

5.9 NM

3.4 NM

1.9 NM

1.1

CATEGORY

A

B

C

D

LPV DA

700-¾

271 (300-¾)

NA

LNAV/
VNAV DA

835-1

406 (400-1)

NA

LNAV MDA

820-¾

391 (400-¾)

820-7/8
391 (400-7/8)

NA

CIRCLING

900-1

459 (500-1)

900-1½
459 (500-1½)

NA

