



RNAV (GPS) RWY 21


TOCCOA RG LETOURNEAU FLD (TOC)

Baro-VNAV and VDP NA when using Gainesville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use Gainesville altimeter setting: Increase LPV DA to 1345 feet, LNAV/VNAV DA to 1510 feet, and increase all MDAs 120 feet, increase LNAV/LNAV visibility all Cats ½ SM, LNAV visibility Cats C/D ¾ SM and C/D visibility Cats A/B ¼ SM and Cat C ½ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH:
Climb to 5800 direct ZIGIP
and on track 295° to
TALLE and hold, continue
climb-in-hold to 5800.

UNICOM
122.8 (CTAF) **L**

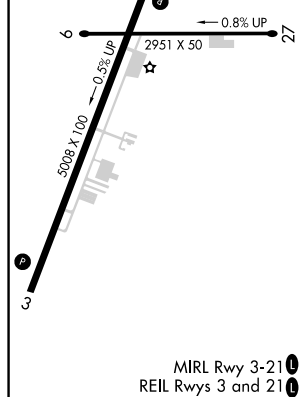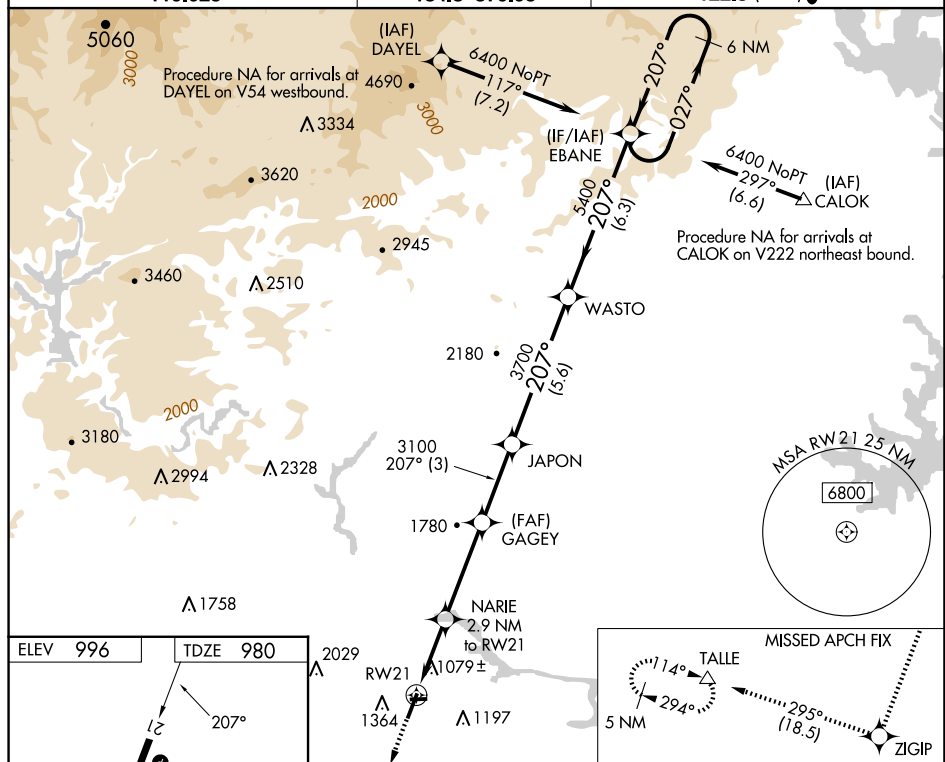

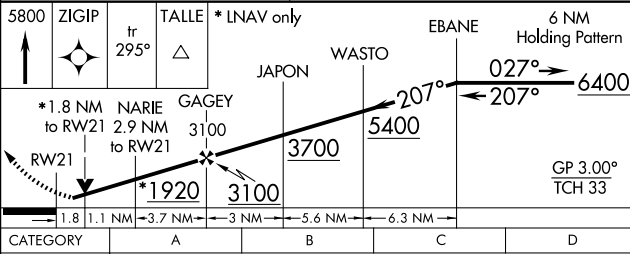5800 ↑	ZIGIP ✦	lr 295°	TALLE △	* LNAV only					
CATEGORY		A		B		C		D	
LPV	DA	1230-1				250 (300-1)			
LNAV/ VNAV	DA	1395-1 $\frac{1}{8}$				415 (400-1 $\frac{1}{8}$)			
LNAV	MDA	1560-1		580 (600-1)		1560-1 $\frac{1}{8}$		580 (600-1 $\frac{1}{8}$)	
C CIRCLING		1720-1		724 (800-1)		1760-2 $\frac{1}{4}$ 764 (800-2 $\frac{1}{4}$)		2480-3 1484 (1500-3)	