

LOC I-SPW 110.9	APP CRS 121°	Rwy Idg TDZE Apt Elev 6001 1339 1339
---------------------------	------------------------	--

ILS or LOC RWY 12
SPENCER MUNI (SPW)

ADF or DME required.

▼

▲NA

For inop ALS, increase S-LOC 12 Cats C and D visibility to 1 1/2 SM.
When local altimeter setting not received, use Estherville altimeter setting and increase S-ILS 12 DA to 1599 feet; increase all MDAs 60 feet and S-LOC 12 visibility Cat C/D 1/2 SM, and Circling visibility Cat C/D 1/2 SM.
For inop ALS, when using Estherville altimeter setting, increase S-LOC 12 Cats C and D visibility to 1 1/2 SM.



MALSR

AS


6

MISSED APPROACH: Climb to 3500 then right turn direct SPW VOR/DME then on SPW VOR/DME R-302 to SNORE LOM/SPW VOR/DME 7 DME and hold.

ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	UNICOM 123.0 (CTAF)
------------------------	---	-------------------------------

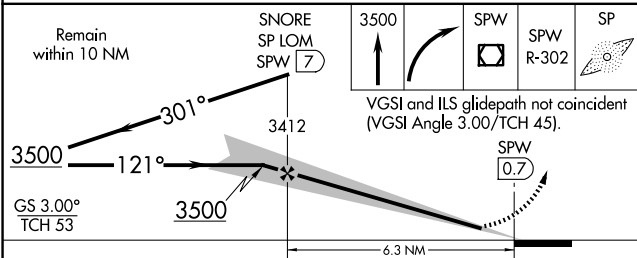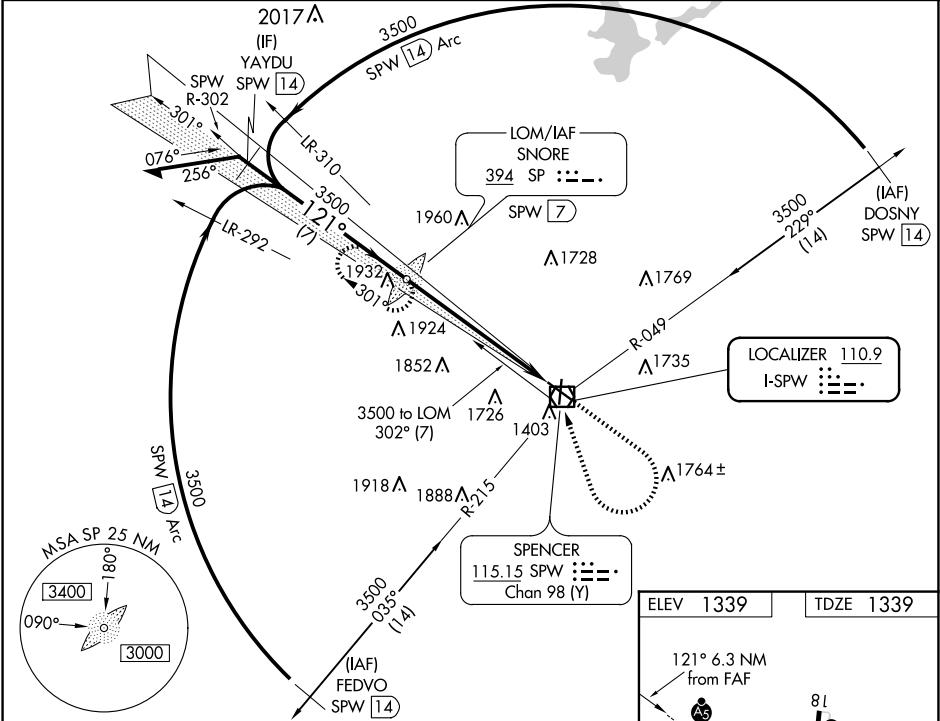

CATEGORY	A	B	C	D
S-ILS 12		1539-1/2	200 (200-1/2)	
S-LOC 12	1900-1/2	561 (600-1/2)	1900-1 1/4	561 (600-1 1/4)
CIRCLING	1900-1	561 (600-1)	2100-2 1/4	2100-2 1/2

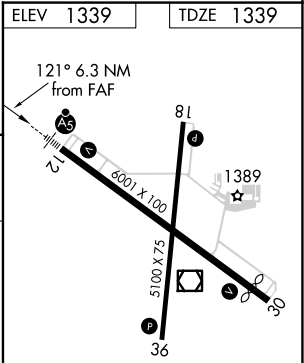

REIL Rwy 18, 30 and 36	
MRL Rwy 12-30 and 18-36	
FAF to MAP 6.3 NM	
Knots	60 90 120 150 180
Min:Sec	6:18 4:12 3:09 2:31 2:06

NC-3, 27 NOV 2025 to 25 DEC 2025

NC-3, 27 NOV 2025 to 25 DEC 2025