

WAAS CH 87133 W30A	APP CRS 301°	Rwy Idg TDZE 1338 Apt Elev 1339
--	------------------------	---

RNAV (GPS) RWY 30

SPENCER MUNI (SPW)

RNP APCH-GPS.


▼

Baro-VNAV and VDP NA when using Estherville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Estherville altimeter setting: increase LPV DA to 1648 feet, LNAV/VNAV DA to 1683 feet and all visibilities ½ SM; increase all MDAs 60 feet and visibility Cats C and D ¼ SM.


MISSED APPROACH:

Climb to 4000 direct YAYDU and hold.

ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

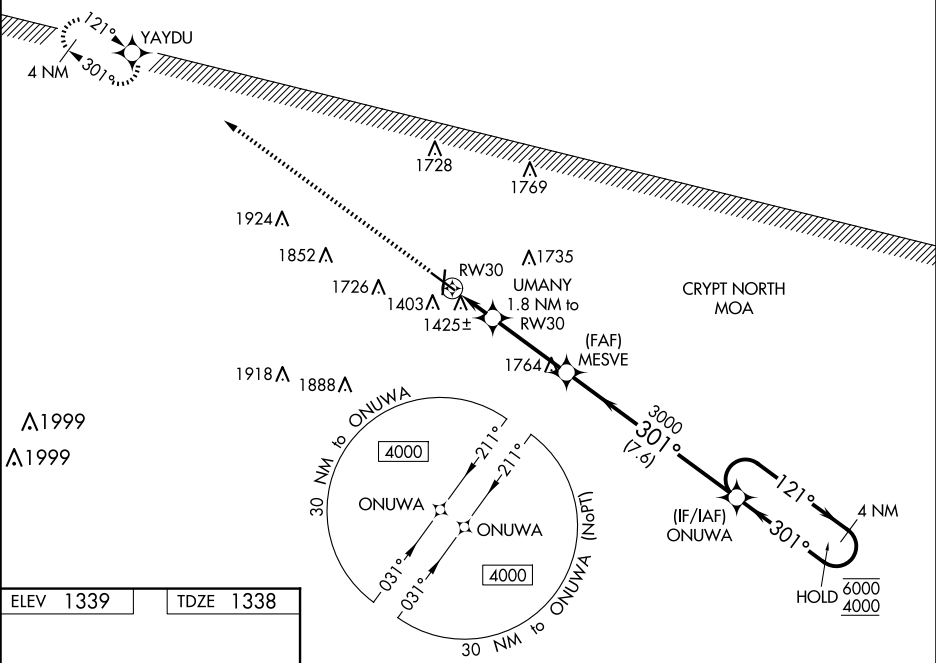

ELEV 1339	TDZE 1338
------------------	------------------

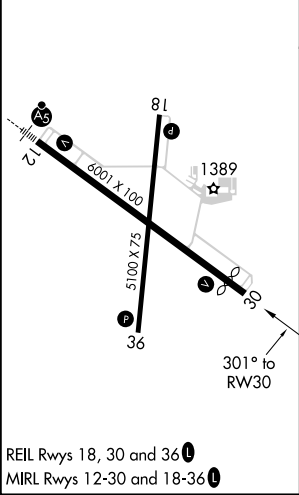

4000	YAYDU	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00°/TCH 26).			
↑	✧	UMANY 1.8 NM to RW30	MESVE 3000	ONUWA 4 NM Holding Pattern	4 NM Holding Pattern
		1.1 NM to RW30	1940	301°	121°
		3.3 NM	7.6 NM	GP 3.00°	TCH 50
CATEGORY	A	B	C	D	
LPV DA	1588-¾		250 (300-¾)		
LNAV/VNAV DA	1623-⅞		285 (300-⅞)		
LNAV MDA	1720-1 382 (400-1)		1720-1½ 382 (400-1½)		
CIRCLING	1760-1 421 (500-1)	1800-1 461 (500-1)	2100-2¼ 761 (800-2¼)	2100-2½ 761 (800-2½)	

NC-3, 27 NOV 2025 to 25 DEC 2025

NC-3, 27 NOV 2025 to 25 DEC 2025