

APP CRS	Rwy Ldg	4700
095°	TDZE	740
	Apt Elev	747

RNAV (GPS) RWY 9
DOWAGIAC MUNI (C91)


RNP APCH - GPS.

▼ Rwy 9 helicopter visibility reduction below 1 SM NA. Circling NA to Rwy 4 and 22.
Obtain local altimeter setting on CTAF, when not recieved, use EKM altimeter setting and increase all MDAs 60 feet, and LNAV visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ¼ SM. Straight-in and Circling Rwy 9 NA at night.

▲ NA

MISSED APPROACH: Climb to 2700 direct YEGTU and hold.

SOUTH BEND APP CON ★ 118.55 257.8	UNICOM 122.8 (CTAF) 0
--------------------------------------	--------------------------

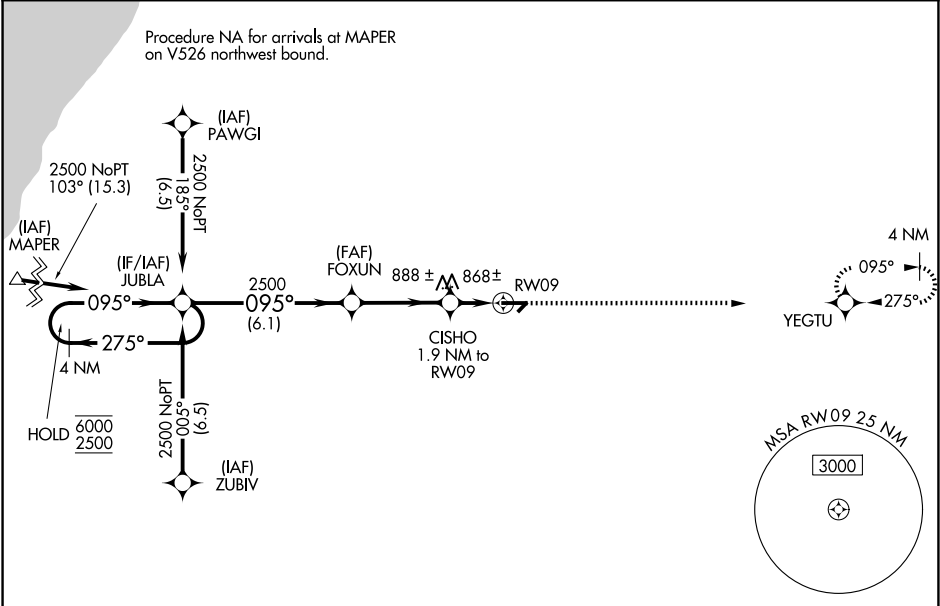

					ELEV 747	TDZE 740
4 NM Holding Pattern JUBLA FOXUN CISHO 1.9 NM to RW09 6000 2500 2500 1380 ←275° 095°→ 095° 3.00° TCH 35 6.1 NM 3.5 NM 1.9 2700 YEGTU					4700 X 100 27 095° 2178 X 100	
CATEGORY	A	B	C	D		
LNAV MDA	1120-1 380 (400-1)					
CIRCLING	1300-1 553 (600-1)	1320-1 573 (600-1)	1320-1½ 573 (600-1½)	1480-2¼ 733 (800-2¼)	REIL Rwy 9 and 27 L MIRL Rwy 9-27 L	

EC-1, 27 NOV 2025 to 25 DEC 2025

EC-1, 27 NOV 2025 to 25 DEC 2025