

LOC I-HEF	APP CRS	Rwy Ldg	6200
109.1	161°	TDZE	192
		Apt Elev	192

ILS or LOC RWY 16L


MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

When local altimeter setting not received, use Dulles altimeter setting and increase DA 49 feet, all MDA 60 feet, and increase Cat C/D Circling visibility ¼ mile.

MALSR

MISSED APPROACH: Climb to 700, then climbing right turn to 3000 direct CSN VORTAC and hold.

ATIS	POTOMAC APP CON	MANASSAS TOWER *	GND CON	CLNC DEL
125.175	128.525 306.925	133.1 (CTAF) 360.75	121.8	120.2

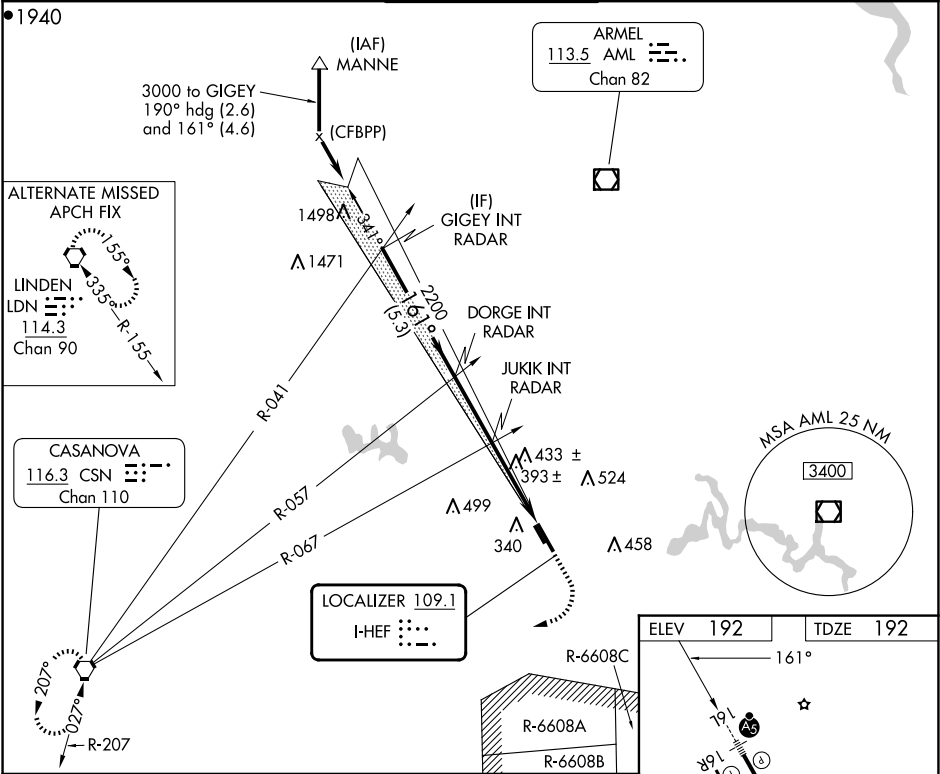

GIGEY INT RADAR		DORGE INT RADAR		JUKIK INT RADAR	
3000		2200		1300	
GS 3.00° TCH 58		161°		*LOC only.	
5.3 NM		2.7 NM		3.4 NM	
CATEGORY	A	B	C	D	
S-ILS 16L	392-½		200 (200-½)		
S-LOC 16L	660-½	468 (500-½)	660-1	468 (500-1)	
CIRCLING	720-1	740-1	840-1¾	880-2¼	
	528 (600-1)	548 (600-1)	648 (700-1¾)	688 (700-2¼)	

ELEV 192 TDZE 192

161°

TWR

3715 X 75

6200 X 100

0.38 UP

34L

34R

HIRL Rwy 16L-34R

MIRL Rwy 16R-34L

REIL Rws 16R and 34L

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02