

WAAS CH 58038 W12A	APP CRS 125°	Rwy Ldg TDZE 1121 Apt Elev 1125
--	------------------------	---

RNAV (GPS) RWY 12


NORTHEAST IOWA RGNL (CCY)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. Baro-VNAV and VDP NA when using ALO altimeter setting. Circling NA to Rwys 4 and 22. When local altimeter setting not received, use ALO altimeter setting and increase LPV DA to 1481 feet; increase LNAV/VNAV DA to 1481 feet; increase all MDAs 120 feet and LNAV visibility Cat C ¾ SM, and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 4000 direct IJBU and hold, continue climb-in-hold to 4000.

AWOS-3 125.525	DES MOINES APP CON★ 118.9 251.15	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

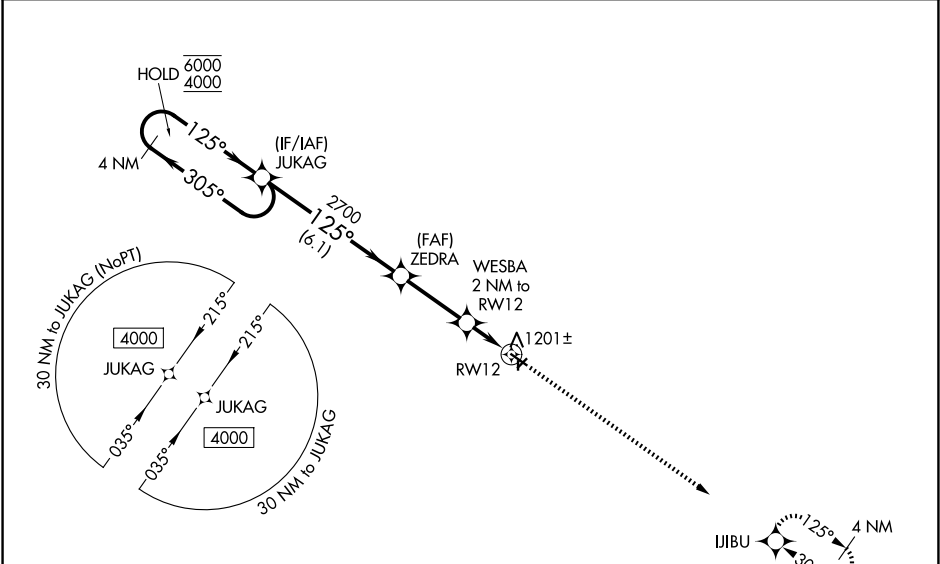

ELEV 1125	TDZE 1121
-----------	-----------

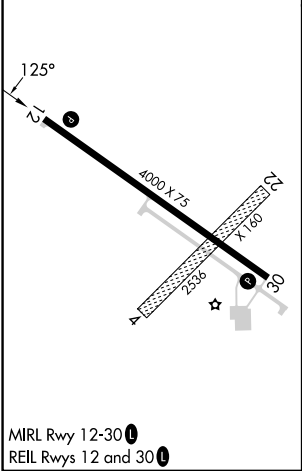

	4 NM Holding Pattern	JUKAG	ZEDRA	WESBA 2 NM to RWY 12	1 NM to RWY 12	RWY 12
	6000 4000	305° 125°	125° 2700	1780	1 NM	1 NM
	GP 3.00° TCH 40	6.1 NM	2.9 NM	1 NM	1 NM	
CATEGORY	A	B	C	D		
LPV DA	1371-1	250 (300-1)		NA		
LNAV/VNAV DA	1371-1	250 (300-1)		NA		
LNAV MDA	1460-1	339 (400-1)		NA		
CIRCLING	1520-1 395 (400-1)	1580-1 455 (500-1)	1760-1¾ 635 (700-1¾)	NA		

NC-3, 27 NOV 2025 to 25 DEC 2025

NC-3, 27 NOV 2025 to 25 DEC 2025