



WAAS CH 90412 W31A	APP CRS 310°	Rwy Idg TDZE 1162 Apt Elev 1162	5505 1162 1162
--	------------------------	---	---

RNAV (GPS) RWY 31

FAIRMONT MUNI (FRM)

RNP APCH-GPS. ▼ For uncompensated Baro-VNAV systems, procedure NA below -17° C or above 54°C. For inop ALS, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1½ SM.	MALSR A5	MISSED APPROACH: Climb to 3100 direct UCEVA and hold.
---	-------------	---

AWOS-3PT 120.025	MINNEAPOLIS CENTER 127.75 257.7	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

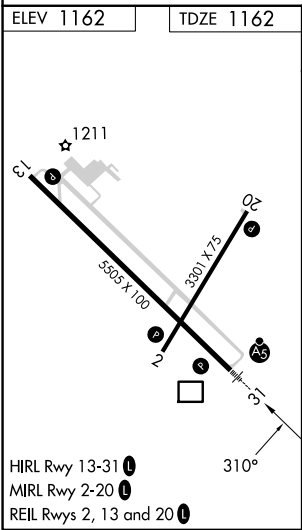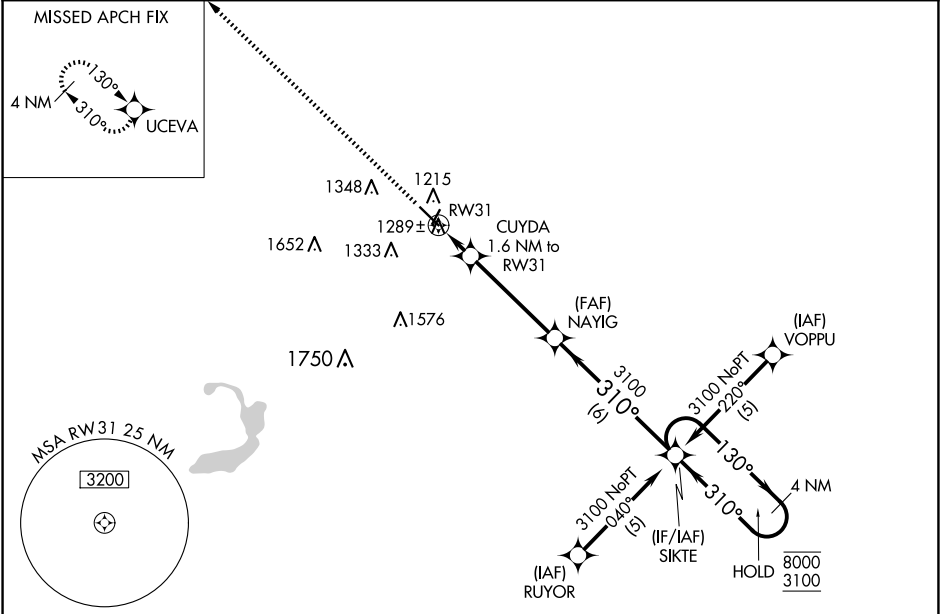

3100	UCEVA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).			
1720	CUYDA 1.6 NM to RW31	1720	3100	3100	3100
1.6 NM	4.2 NM	6 NM	4 NM	Holding Pattern	
CATEGORY	A	B	C	D	
LPV DA	1467-1½ 305 (400-½)				
LNAV/VNAV DA	1581-¾ 419 (500-¾)				
LNAV MDA	1560-½ 398 (400-½)	1560-⅝ 398 (400-⅝)			
CIRCLING	1660-1 498 (500-1)	1980-2½ 818 (900-2½)		1980-2¾ 818 (900-2¾)	