

LOC/DME I- <u>UZA</u>	APP CRS	Rwy Idg
<u>108.5</u>	<u>016°</u>	5500
Chan 22		TDZE 666
		Apt Elev 666

ILS Z or LOC Z RWY 2

ROCK HILL/YORK COUNTY/BRYANT FLD (UZA)

NA



ADF or DME required. VDP NA with Charlotte/Douglas Intl altimeter setting. When local altimeter setting not received, use Charlotte/Douglas Intl altimeter setting and increase all DA 45 feet and all MDA 60 feet. Increase S-LOC 2 Cat C/D visibility ¼ mile. For inop MALSRL, increase S-LOC 2 Cat C/D visibility to 1½ mile. For inop MALSRL, when using Charlotte/Douglas Intl altimeter setting, increase S-LOC 2 Cat C/D visibility to 1½ mile.

MALSRL

MISSED APPROACH:

Climb to 1500 then climbing left turn to 3000 on heading 174° and CLT VOR/DME R-203 to CONEL/I-UZA 12.7 DME/RADAR and hold.

ASOS 120.775	CHARLOTTE APP CON 120.05 307.8	GCO 121.725	UNICOM 123.05 (CTAF) 1
------------------------	--	-----------------------	---

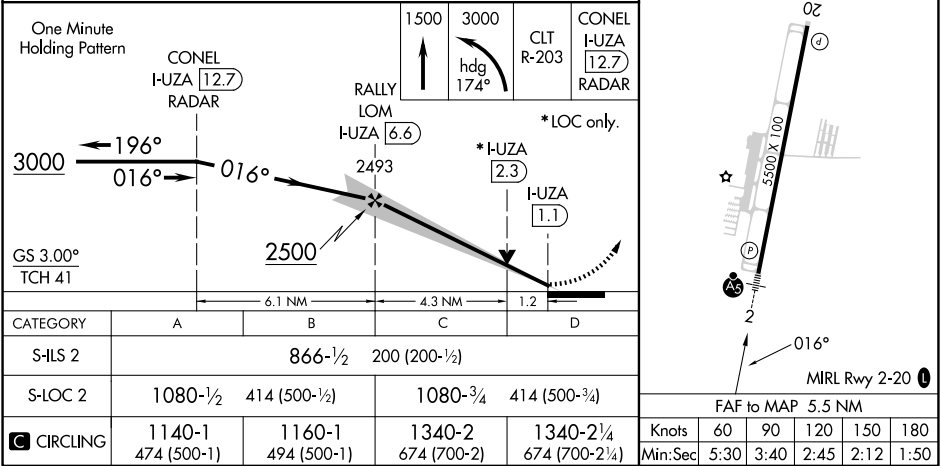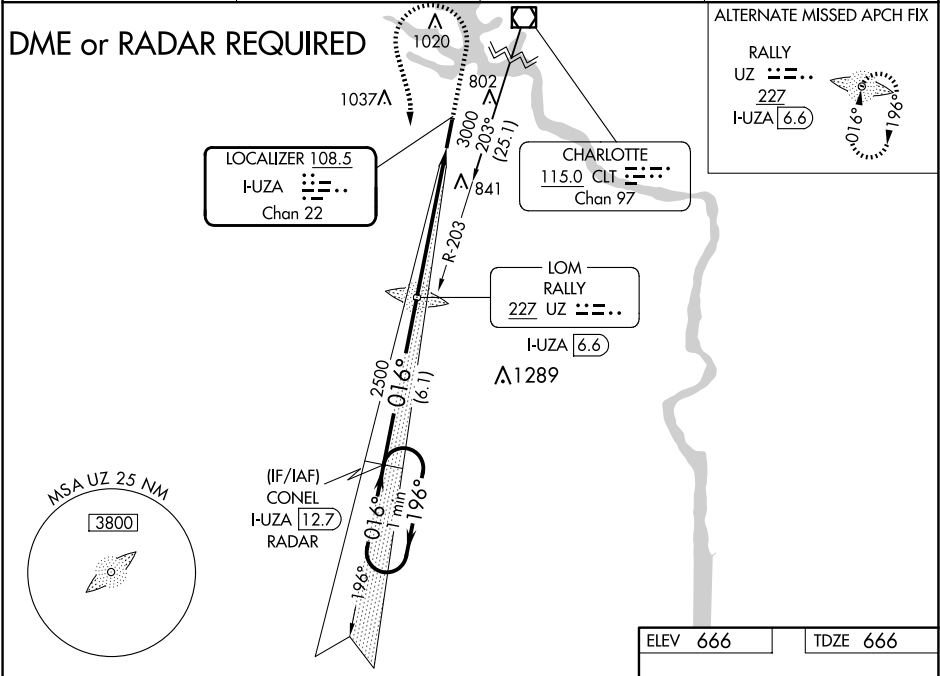

ILS Z or LOC Z RWY 2

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025