


WAAS CH 90325 W20A	APP CRS 196°	Rwy Idg TDZE Apt Elev	5500 662 666
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20

ROCK HILL/YORK COUNTY/BRYANT FLD (UZA)

RNP APCH-GPS. T A For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 39°C. When local altimeter setting not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 957 feet, LNAV/VNAV DA to 1084 feet, and all MDAs 60 feet; increase LPV visibility all Cats ½ SM, LNAV/VNAV visibility all Cats ¼ SM, and LNAV visibility Cat C/D ¼ SM. VDP and Baro-VNAV NA when using Charlotte/Douglas Intl altimeter setting. Rwy 20 helicopter visibility reduction below ¾ SM NA.		MISSED APPROACH: Climb to 3000 direct CONEL and hold.	
ASOS 120.775	CHARLOTTE APP CON 120.05 307.8	GCO 121.725	UNICOM 123.05 (CTAF) 0

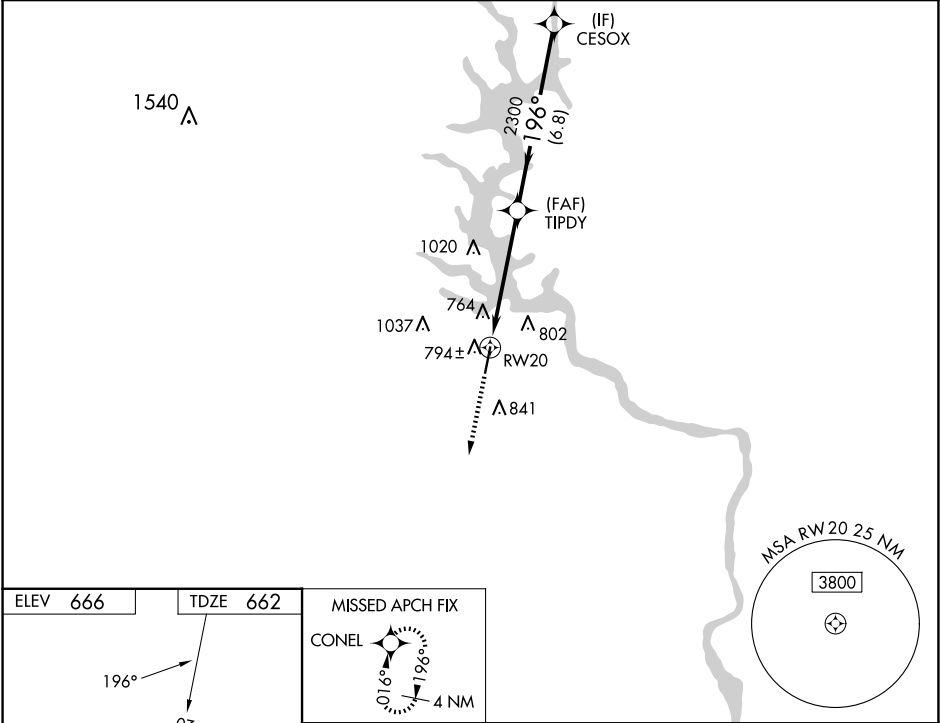

3000

↑

CONEL

✦

*LNAV only.

RW20

*1.1 NM to RW20

TIPDY 2300

CESOX 2300

196°

2300

GP 3.00°

TCH 40

1.1 NM

3.9 NM

6.8 NM

CATEGORY	A	B	C	D
LPV DA	912-¾		250 (300-¾)	
LNAV/VNAV DA	1039-1		377 (400-1)	
LNAV MDA	1060-1	398 (400-1)	1060-1½	398 (400-1½)
CIRCLING	1140-1 474 (500-1)	1160-1 494 (500-1)	1340-2 674 (700-2)	1340-2¼ 674 (700-2¼)

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025